


ELAR 108 Par RGBW
Photometric Beam Angle Data

10° Beam Angle, 22° Field Angle / 15° Lens

LUX x 0.0929 = FC

R (12)	915 FC / 9,850 LUX	235 FC / 2,531 LUX	104 FC / 1,117 LUX
G (9)	1,537 FC / 16,550 LUX	414 FC / 4,460 LUX	187 FC / 2,012 LUX
B (9)	289 FC / 3,110 LUX	80 FC / 858 LUX	36 FC / 385 LUX
W (6)	773 FC / 8,320 LUX	223 FC / 2,402 LUX	100 FC / 1,076 LUX
Full (36)	3,456 FC / 37,200 LUX	941 FC / 10,130 LUX	416 FC / 4,480 LUX

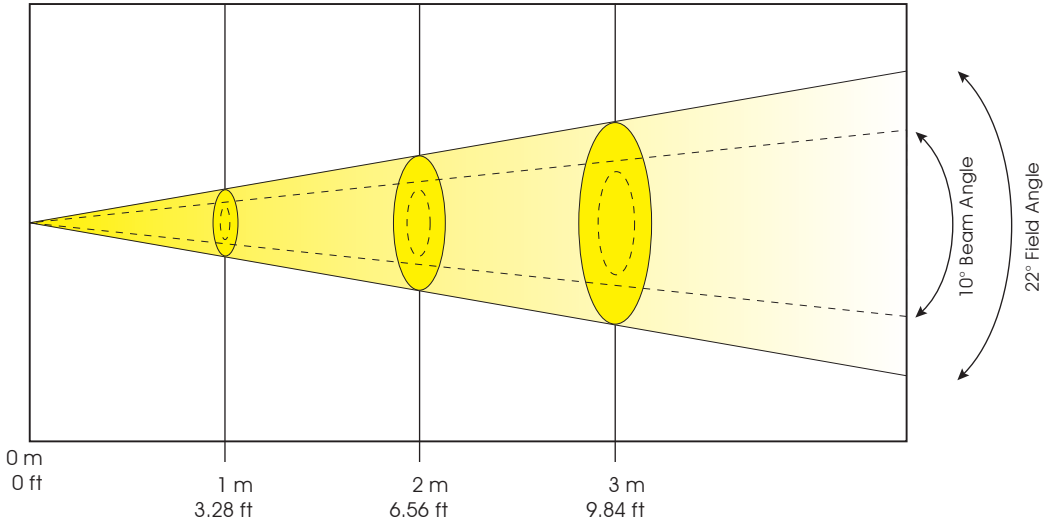

Beam Diameter

10° Beam Angle	Ø 0.22 m / Ø 0.72 ft	Ø 0.44 m / Ø 1.44 ft	Ø 0.66 m / Ø 2.17 ft
22° Field Angle	Ø 0.44 m / Ø 1.44 ft	Ø 0.88 m / Ø 2.89 ft	Ø 1.32 m / Ø 4.33ft