


Opti Tri 30
Photometric Beam Angle Data

Standard 10° Beam Angle

LUX x 0.0929 = FC

R	239 FC / 2570 LUX	27 FC / 289 LUX	6 FC / 68 LUX	2 FC / 26 LUX
G	343 FC / 4020 LUX	51 FC / 545 LUX	13 FC / 142 LUX	5 FC / 53 LUX
B	26 FC / 280 LUX	4 FC / 46 LUX	1 FC / 13 LUX	0.5 FC / 5 LUX
W	603 FC / 6490 LUX	75 FC / 806 LUX	19 FC / 207 LUX	7 FC / 76 LUX

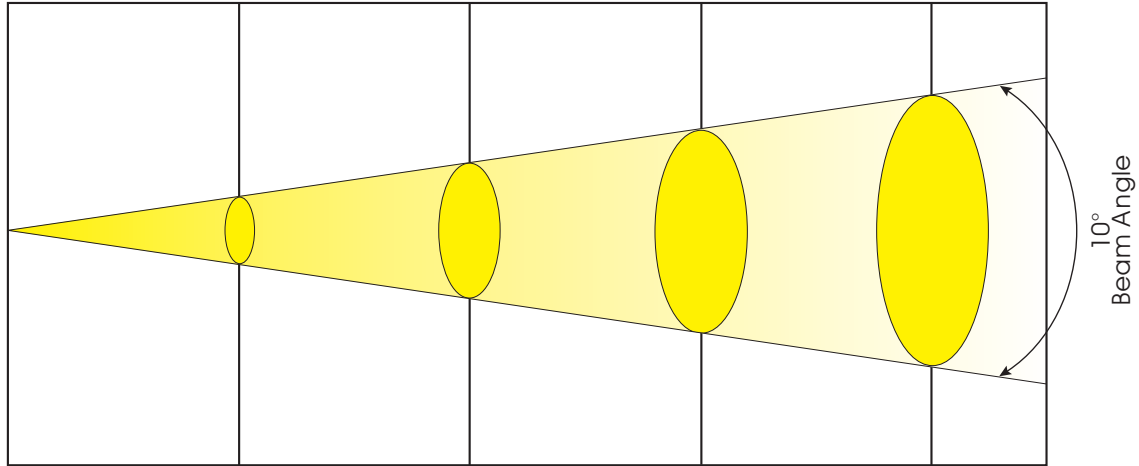

0 m	0.5 m	1.5 m	3 m	5 m
0 ft	1.6 ft	4.9 ft	9.8 ft	16.4 ft

Beam Diameter

10° Beam Angle	Ø 0.99 m / Ø 3.23 ft	Ø 0.64 m / Ø 2.08 ft	Ø 0.37 m / Ø 1.22 ft	Ø 0.19 m / Ø 0.65 ft
----------------	----------------------	----------------------	----------------------	----------------------