

PLATINUM WASH ZFX PRO XL™

SKU# EPW868




Photometric Data

Specifications subject to change without any prior written notice.

RED LEDs	385 FC / 4144 LUX	76 FC / 822 LUX	37 FC / 398 LUX
GREEN LEDs	899 FC / 9681 LUX	82 FC / 884 LUX	39 FC / 421 LUX
BLUE LEDs	443 FC / 4770 LUX	91 FC / 981 LUX	42 FC / 455 LUX
WHITE LEDs	1223 FC / 13,170 LUX	116 FC / 1244 LUX	55 FC / 592 LUX
FULL ON	2046 FC / 22,020 LUX	342 FC / 3680 LUX	161 FC / 1736 LUX


LUX x 0.0929 = FC

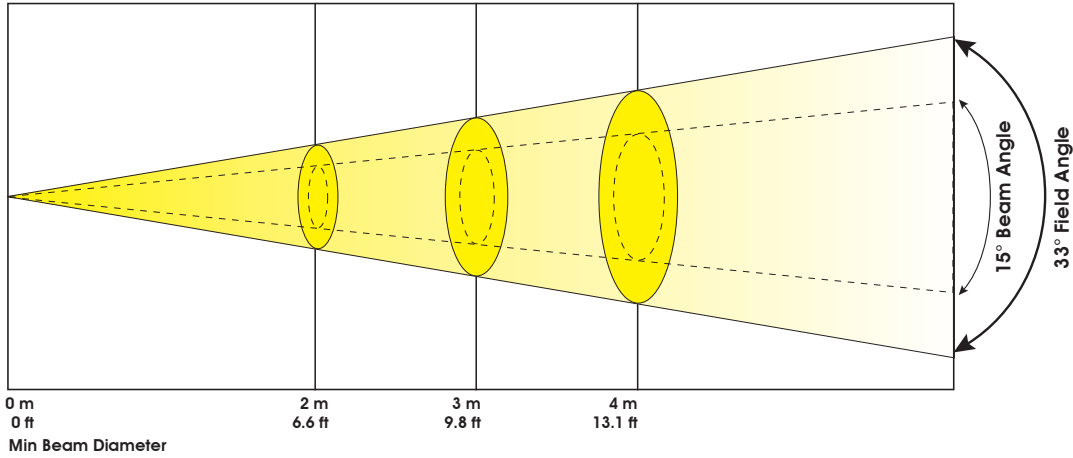

15° Beam Angle	∅ 0.5 m / ∅ 1.8 ft	∅ 0.8 m / ∅ 2.7 ft	∅ 1.8 m / ∅ 5.9 ft
33° Field Angle	∅ 1.2 m / ∅ 3.9 ft	∅ 1.8 m / ∅ 5.9 ft	∅ 2.4 m / ∅ 7.9 ft

RED LEDs	165 FC / 1781 LUX	63 FC / 680 LUX	38 FC / 410 LUX
GREEN LEDs	358 FC / 3856 LUX	153 FC / 1645 LUX	126 FC / 1352 LUX
BLUE LEDs	405 FC / 4360 LUX	73 FC / 790 LUX	18 FC / 190 LUX
WHITE LEDs	449 FC / 4835 LUX	195 FC / 2100 LUX	150 FC / 1620 LUX
FULL ON	1106 FC / 11,900 LUX	704 FC / 7580 LUX	489 FC / 5260 LUX

LUX x 0.0929 = FC

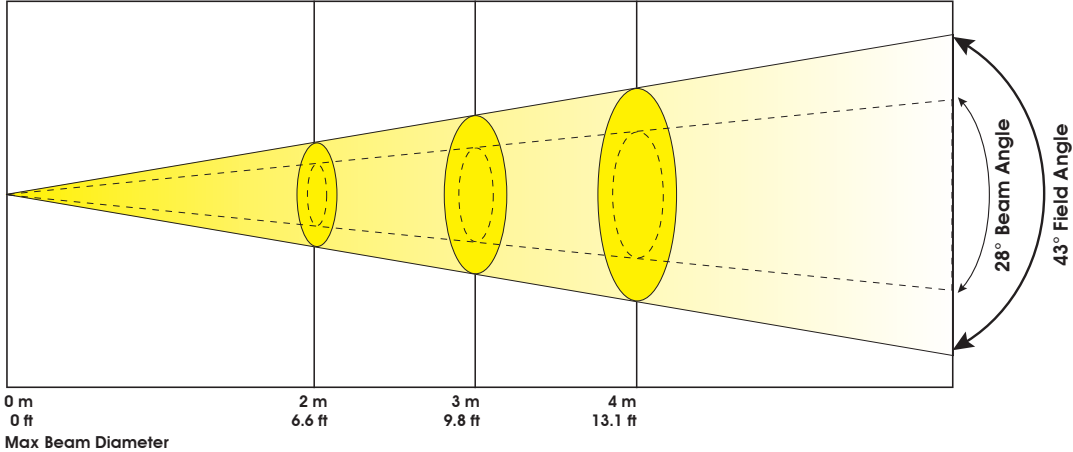

28° Beam Angle	∅ 1.0 m / ∅ 1.8 ft	∅ 1.5 m / ∅ 4.9 ft	∅ 2.0 m / ∅ 6.6 ft
43° Field Angle	∅ 1.6 m / ∅ 3.9 ft	∅ 2.4 m / ∅ 7.9 ft	∅ 3.2 m / ∅ 10.5 ft

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu