

CUEPIX PANEL™

SKU# CUE295




Photometric Data

Specifications and improvements in the design of this unit are subject to change without any prior written notice.

PRELIMINARY

RED LEDs	307 FC / 3310 LUX	98 FC / 1058 LUX	50 FC / 535 LUX	27 FC / 295 LUX	15 FC / 161 LUX
GREEN LEDs	346 FC / 3720 LUX	112 FC / 1205 LUX	73 FC / 784 LUX	34 FC / 364 LUX	19 FC / 203 LUX
BLUE LEDs	545 FC / 5870 LUX	175 FC / 1880 LUX	105 FC / 1135 LUX	59 FC / 635 LUX	28 FC / 302 LUX
FULL ON	1439 FC / 15,490 LUX	486 FC / 5230 LUX	234 FC / 2520 LUX	107 FC / 1150 LUX	68 FC / 731 LUX

LUX x 0.0929 = FC

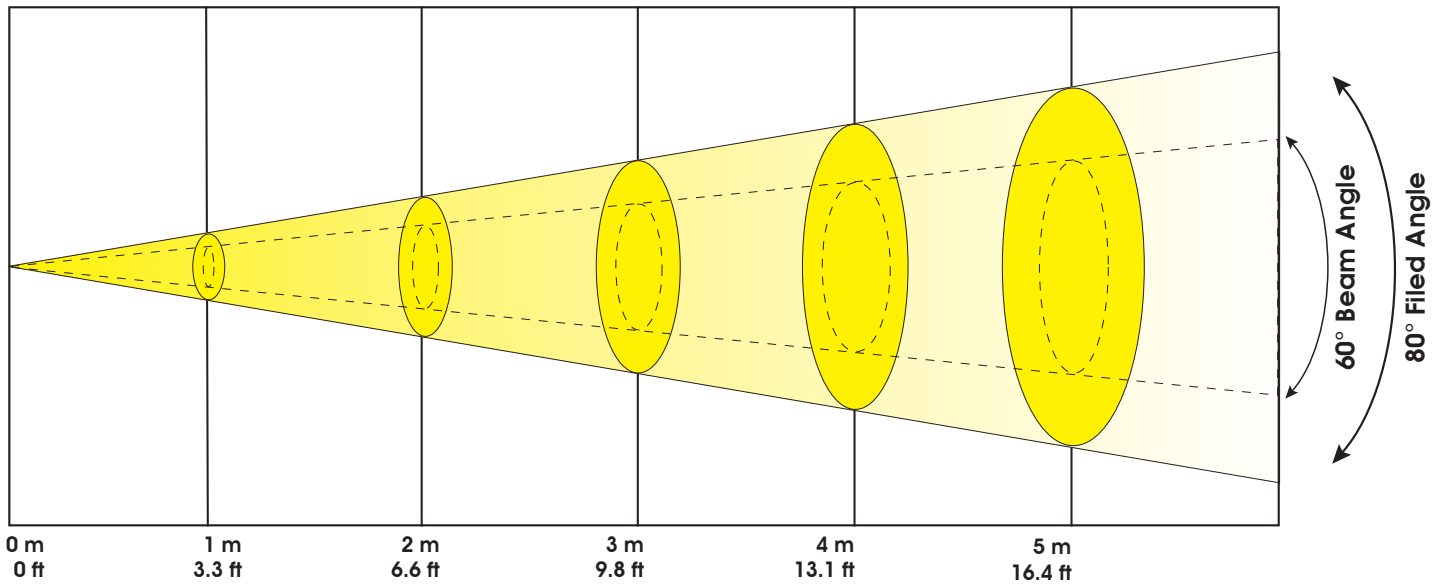

60° Beam Angle	Ø 1.7 m / Ø 5.4 ft	Ø 2.9 m / Ø 9.4 ft	Ø 4.0 m / Ø 13.0 ft	Ø 5.1 m / Ø 16.7 ft	Ø 6.3 m / Ø 20.5 ft
80° Field Angle	Ø 2.2 m / Ø 7.2 ft	Ø 3.9 m / Ø 12.6 ft	Ø 5.5 m / Ø 18.1 ft	Ø 7.2 m / Ø 23.6 ft	Ø 8.9 m / Ø 29.2 ft

Elation Professional USA - Corporate Headquarters | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional Florida | 13185 NW 47th Ave. | Miami Gardens, FL. 33054

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu