

CUEPIX STRIP TRI™

SKU# CUE283




Photometric Data

Specifications and improvements in the design of this unit are subject to change without any prior written notice.

RED LEDs	109 FC / 1169 LUX	29 FC / 315 LUX	14 FC / 151 LUX	8 FC / 84 LUX	5 FC / 57 LUX
GREEN LEDs	111 FC / 1199 LUX	31 FC / 332 LUX	14 FC / 156 LUX	8 FC / 85 LUX	5 FC / 57 LUX
BLUE LEDs	175 FC / 1880 LUX	47 FC / 508 LUX	22 FC / 232 LUX	12 FC / 133 LUX	8 FC / 88 LUX
FULL ON	387 FC / 4170 LUX	107 FC / 107 LUX	50 FC / 540 LUX	24 FC / 253 LUX	15 FC / 157 LUX

LUX x 0.0929 = FC

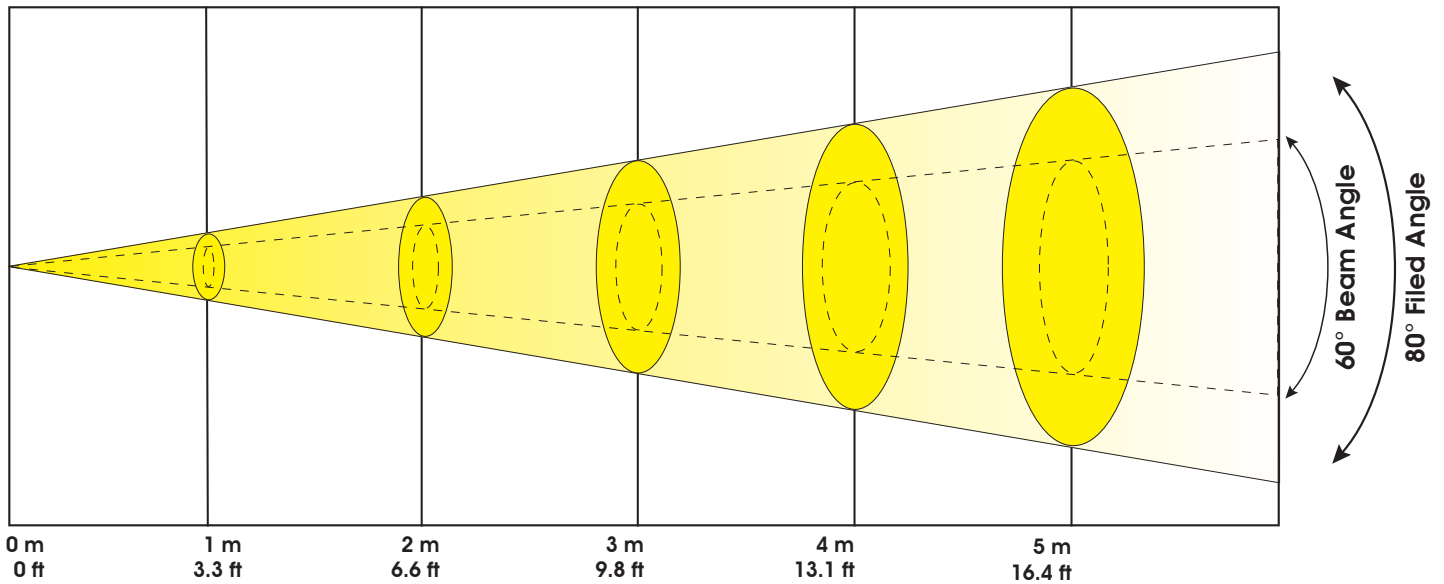

60° Beam Angle	Ø 1.7 m / Ø 5.4 ft	Ø 2.4 m / Ø 7.7 ft	Ø 3.5 m / Ø 10.6 ft	Ø 4.6 m / Ø 15.1 ft	Ø 5.8 m / Ø 18.9 ft
80° Field Angle	Ø 2.2 m / Ø 7.2 ft	Ø 3.4 m / Ø 11.0 ft	Ø 5.0 m / Ø 16.5 ft	Ø 6.7 m / Ø 22.0 ft	Ø 8.4 m / Ø 27.6 ft

PRELIMINARY

Elation Professional USA - Corporate Headquarters | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional Florida | 13185 NW 47th Ave. | Miami Gardens, FL. 33054

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu