



PLATINUM PROFILE 35 PRO™

SKU# EPP409

FEATURES

- 1200-Watt Comparable Lumens Output
- 8° - 50° Zoom and Motorized 4 Blade Framing
- Rotating Gobo Wheel with 6 Glass Gobos
- Fixed Gobo Wheel with 3 Gobos + 160° Animation
- 3-Facet Rotating Prism with 16 Prism Macros
- Motorized Focus and 5% - 100% Iris
- Built-In EWDMX Wireless DMX Receiver
- Rechargeable Backup Battery for Menu Display



The new Platinum Profile 35 PRO features the MSR Platinum 35, 800-watt lamp from Phillips™, 16-bit resolution on all motor functions, 2 gobo wheels with a total of 6 interchangeable, rotating, and indexing glass gobos, 3 fixed indexing gobos and a 160° animation effect, variable CMY color mixing and CTO, a static color wheel with 8 dichroic colors including UV and CTB, 3 facet rotating / indexing prism, frost filter, motorized focus / zoom system with an 8° to 50° beam angle, motorized 4 blade framing, pan/tilt lock, built-in EWDMX wireless DMX receiver, 3 and 5pin DMX connections, full color 180° reversible menu display with 6 button touch control panel, battery backup for display power, and a multi-voltage universal auto switching power supply (100-240v).



Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

FEATURES

1200-Watt Comparable Lumens Output
 Motorized 8° - 50° Zoom + 4 Blade Framing
 Built-In EWDMX Wireless DMX Receiver

SOURCE

Phillips™ 800-Watt MSR Platinum 35
 750 Hour Average Life

PHOTOMETRIC DATA

20,101 Total Lumens, 7,400K, >60CRI
 18,750 LUX @10M 8° Min Zoom
 812 LUX @10M 50° Max Zoom

EFFECTS

4 Blade Framing
 160° Animation Effect
 Frost Filter
 3-Facet Prism and 16 Prism Macros
 Strobe and 5% - 100% Iris
 Mechanical Dimming: 0% - 100%

COLOR

Variable CMY Color Mixing & CTO
 8 Interchangeable Dichroic Colors Including UV + CTB

GOBOS

2 Gobo Wheels
 6 Interchangeable / Rotating / Indexing Glass Gobos
 3 Fixed / Indexing Gobos + 160° Animation
 Size: OD 29mm / ID 24mm

CONTROL / CONNECTIONS

3 DMX Channel Modes (37/39/60)
 3pin & 5pin DMX In/Out
 6 Button Touch Control Panel
 Full Color 180° Reversible LCD Menu Display
 8 / 16 Bit Resolution Adjustable Movement
 powerCON Power In

SIZE / WEIGHT

Length: 19.9" (506.5mm)
 Width: 17.6" (447.3mm)
 Vertical Height: 28.6" (726.5mm)
 Weight: 88.2 lbs. (40kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
 1044W Max Power Consumption
 -13°F to 113°F (-25°C to 45°C)


APPROVALS / RATINGS

CE Approved
 cETLus Approved
 IP20 Rated

PHOTOMETRIC DATA

8° MIN Beam Angle 7,142 FC / 76,880 LUX 3,112 FC / 33,500 LUX 1,742 FC / 18,750 LUX
 50° MAX Beam Angle 253 FC / 2,725 LUX 120 FC / 1,290 LUX 75 FC / 812 LUX


LUX x 0.0929 = FC

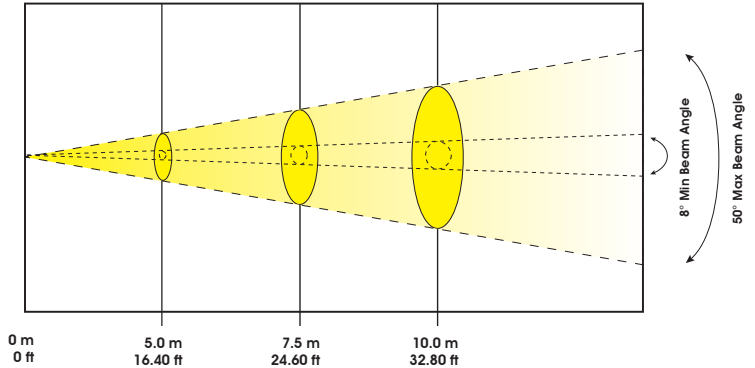


0 m 0 ft 5.0 m 16.40 ft 7.5 m 24.60 ft 10.0 m 32.80 ft

| Max Beam Diameter | | | |
|-------------------|----------------------|----------------------|----------------------|
| 8° Beam Angle | Ø 0.70 m / Ø 2.3 ft | Ø 1.05 m / Ø 3.4 ft | Ø 1.40 m / Ø 4.6 ft |
| 50° Field Angle | Ø 4.66 m / Ø 15.3 ft | Ø 6.99 m / Ø 22.9 ft | Ø 9.33 m / Ø 30.6 ft |

COLORS & GOBOS

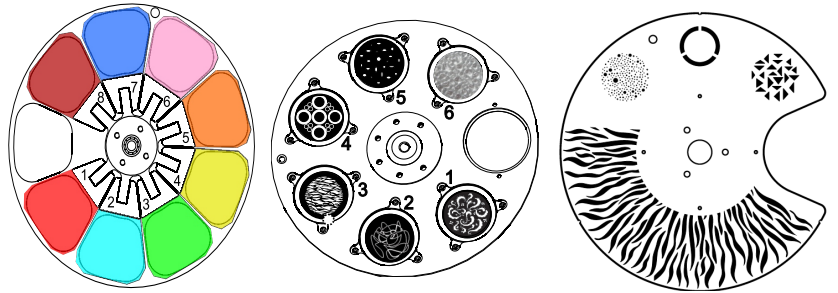

DIMENSIONAL DIAGRAM (MM)

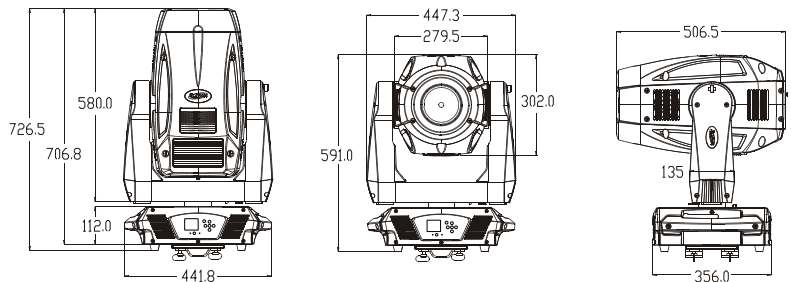

ACCESSORIES



EWDMXT
 Wireless DMX Transmitter



E-LOADER
 Software Update Box