



REPORT

25800 COMMERCENTRE DRIVE, LAKE FOREST, CA 92630

Project No. G101918458

Date: February 2, 2015

REPORT NO. 101918458LAX-009

TEST OF ONE LED BLINDER

MODEL NO. CUEPIX BLINDER WW4

RENDERED TO

ELATION LIGHTING INC.
6122 S. EASTERN AVE
COMMERCE CA 90040

TEST: Electrical and Photometric tests as required to the IESNA test standard.

STATEMENT OF LIMITATION: This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

AUTHORIZATION: The testing performed was authorized by signed quote number Q500519256.

STANDARDS USED: The following American National Standards or Illuminating Engineering Society of North America Test Guides were used in part or totally to test each specimen:

IESNA LM-79 - 2008: Electrical and Photometric Measurements of Solid State Lighting

DESCRIPTION OF SAMPLE: The client submitted one production sample of model number CUEPIX BLINDER WW4. The sample was received by Intertek on January 29, 2015, in undamaged condition and one sample was tested as received. The sample designation was LAN1501290915-002.

DATES OF TESTS: January 29, 2015 through January 30, 2015.

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

SUMMARY

Model No.: CUEPIX BLINDER WW4
Description: LED Blinder

Criteria	Result	
	Sphere	Goniometer
Total Lumen Output (Lumens)	19928	19301
Total Power (W)	432.7	429.8
Luminaire Efficacy (LPW)	46.06	44.91

Criteria	Result
Power Factor	0.987
Current ATHD %	11.49
Correlated Color Temperature (CCT - K)	3254
Color Rendering Index (CRI - Ra)	83.8
Color Rendering Index (CRI - R9)	22.7
DUV	0.003
Chromaticity Coordinate (x)	0.423
Chromaticity Coordinate (y)	0.406
Chromaticity Coordinate (u')	0.241
Chromaticity Coordinate (v')	0.520

EQUIPMENT LIST

Equipment Used	Model Number	Control Number	Last Date Calibrated	Calibration Due Date
LabSphere Power Supply	LPS-100-0833	000832	05/20/14	05/20/15
LapSphere 3M Integrating Sphere	CA-11821-LRT	000830	01/26/15	02/26/15
LabSphere Spectrometer	CDS-3020	000834	01/26/15	02/26/15
California Instruments Power Supply	CSW5550	001338	VBU	VBU
Yokogawa Power Meter	WT333	001319	05/15/14	05/15/15
Extech Instruments Stop Watch	365510	001390	12/08/14	12/08/15
Temp. & RH Meter	971	001178	12/22/14	12/22/15
LSI High Speed Mirror Goniometer	6440T	000943	01/26/15	02/26/15
Elgar Power Supply	CW1251	000944	VBU	VBU
Yokogawa Power Analyzer	WT210	000945	11/26/14	11/26/15
Temp. & RH Meter	971	001178	12/22/14	12/22/15
Extech Instruments Stop Watch	N/A	001390	12/08/14	12/08/15
Tape Measure	33-430	001491	12/08/14	12/08/15



TEST METHODS

Seasoning in Sample Orientation – LED Products

No seasoning was performed in accordance with IESNA LM-79.

Photometric and Electrical Measurements – Integrating Sphere Method

A Labsphere CDS 3020 Spectrometer and Three Meter Sphere was used to measure correlated color temperature, chromaticity coordinates, and the color rendering index for each SSL unit.

Ambient temperature was measured at a position inside the sphere. Each SSL unit was operated on the client provided driver at the rated input voltage in its designated orientation. Each SSL unit was allowed to stabilize for at least thirty minutes before measurements were made. Electrical measurements including voltage, current, and power were measured using the Yokogawa Power Analyzer.

The calibration of the sphere spectrometer system is traceable to the National Institute of Standards and Technology.

Photometric and Electrical Measurements – Distribution Method

A LSI Type C High Speed Model 6440 Mirror Goniometer was used to measure the intensity (candelas) at each angle of distribution for each sample.

Ambient temperature was measured equal to the height of the sample mounted on the Goniometer equipment. Each sample was operated at input rated voltage in its designated orientation. Each sample was allowed to stabilize for at least thirty minutes before measurements were made. Electrical measurements including voltage, current, and power were measured using the Yokogawa Power Analyzer.

Some graphics were created with Photometrics Plus software.

RESULTS OF TEST

Photometric and Electrical Measurements at Ambient Temperature (25°C +/- 1°C) - Integrating Sphere Method


Intertek Sample No.	Base Orientation	Input Voltage {Vac}	Input Current (mA)	Input Power (Watts)	Input Power Factor	Current ATHD (%)	Luminous Flux (Lumens)	Lumen Efficacy (LPW)
LAN1501290915-002	UP	120.0	3656	432.7	0.987	11.49	19928	46.06

Correlated Color Temperature (K)	CRI -Ra	CRI -R9	DUV	CIE 31' Chromaticity Coordinate	CIE 31' Chromaticity Coordinate (y)	CIE 76' Chromaticity Coordinate (u')	CIE 76' Chromaticity Coordinate (v')
3254	83.8	22.7	0.003	0.423	0.406	0.241	0.520

Spectral Distribution over Visible Wavelengths

nm	mW/nm	nm	mW/nm	nm	mW/nm	nm	mW/nm	nm	mW/nm
350	-0.189	440	48.800	530	149.70	620	234.000	710	46.820
355	-0.420	445	73.130	535	159.00	625	226.900	715	40.920
360	-0.387	450	106.000	540	168.10	630	218.300	720	35.690
365	-0.435	455	138.600	545	176.60	635	208.300	725	31.170
370	-0.277	460	145.200	550	184.90	640	197.300	730	26.820
375	-0.184	465	123.800	555	193.30	645	185.000	735	23.010
380	-0.129	470	102.800	560	201.50	650	172.700	740	19.690
385	-0.117	475	87.720	565	210.10	655	160.000	745	16.930
390	-0.170	480	75.130	570	218.30	660	147.400	750	14.510
395	-0.029	485	68.830	575	225.70	665	134.700	755	12.550
400	0.104	490	69.040	580	232.40	670	122.300	760	11.000
405	0.476	495	74.290	585	238.00	675	110.200	765	9.312
410	1.312	500	82.890	590	241.50	680	98.970	770	8.002
415	3.021	505	94.060	595	243.40	685	88.170	775	6.860
420	6.351	510	106.000	600	244.90	690	78.100	780	5.889
425	11.810	515	118.000	605	245.40	695	68.890		
430	19.660	520	129.600	610	243.50	700	60.730		
435	31.450	525	139.800	615	240.10	705	53.420		

Spectral Data Over Visible Wavelengths

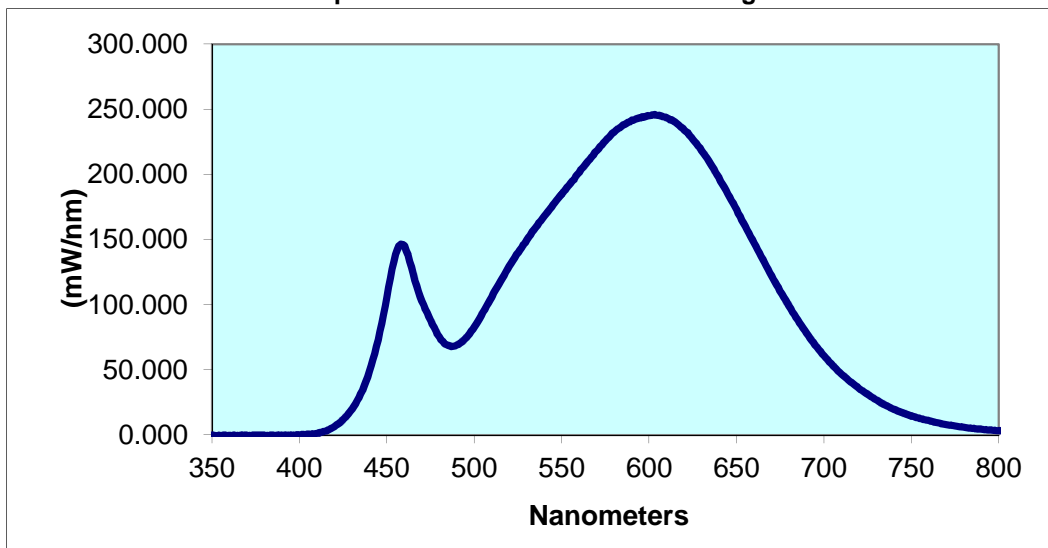

RESULTS OF TEST (cont'd)


Photometric and Electrical Measurements at Ambient Temperature (25°C +/- 1°C) – Distribution Method

Intertek Sample No.	Base Orientation	Input Voltage {Vac}	Input Current (mA)	Input Power (Watts)	Input Power Factor	Absolute Luminous Flux (Lumens)	Lumen Efficacy (Lumens Per Watt)
LAN1501290915-002	UP	120.0	3651	429.8	0.981	19301	44.91

Intensity (Candlepower) Summary at 25°C - Candelas

Maximum Candela Value: 16,738.2

Angle	0	22.5	45	67.5	90
0	16730	16730	16730	16730	16730
5	16298	16306	16483	16343	16354
10	15210	15237	15404	15257	15260
15	13730	13734	13902	13766	13803
20	12151	12130	12295	12131	12173
25	10603	10579	10746	10596	10597
30	9206	9266	9435	9279	9264
35	8165	8174	8347	8201	8183
40	6600	6717	6933	6819	6798
45	3862	3982	4098	4029	4097
50	1342	1405	1440	1425	1429
55	610	619	659	644	646
60	447	458	478	465	467
65	305	316	347	343	332
70	212	221	229	230	241
75	109	140	120	134	130
80	50	53	70	58	65
85	29	19	33	12	33
90	4	11	0	6	6

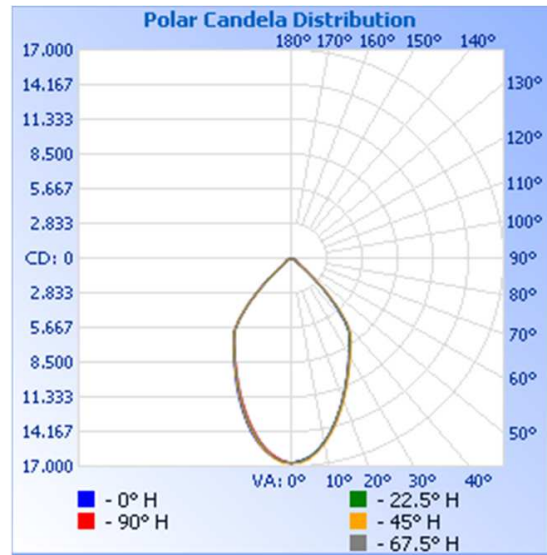


RESULTS OF TEST (cont'd)


Illumination Plots

Mounting Height: 10 ft.

Illuminance - Cone of Light

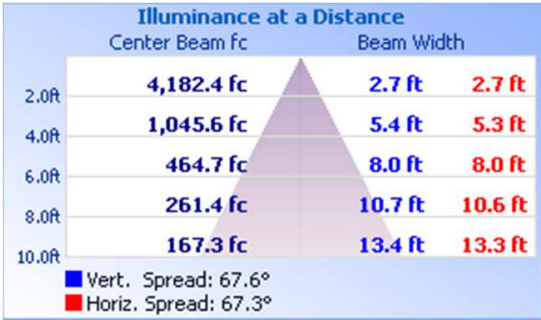

Isoillumination Plot

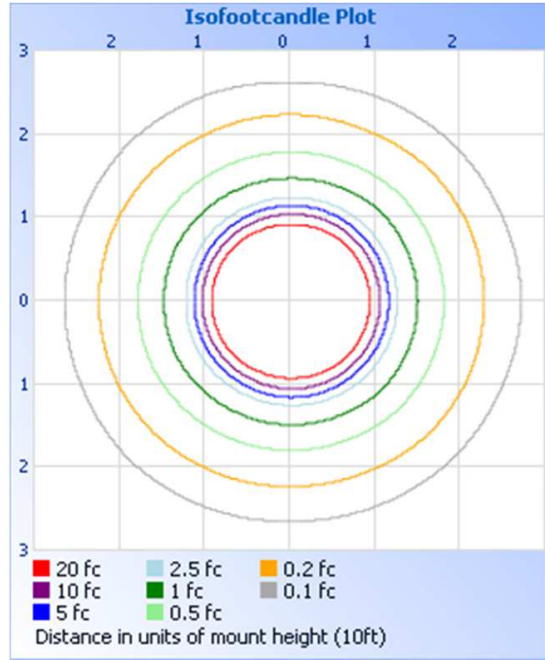

Zonal Lumen Summary and Percentages at 25°C

Zone	Lumens	% Luminaire
0-30	10208	52.9
0-40	15242	79.0
0-60	18806	97.4
60-90	493.9	2.6
0-90	19300	100.0
90-180	0.7	0.0
0-180	19301	100.0

Zonal Lumens and Percentages at 25°C

Zone	Lumens	% Luminaire
0-10	1521	7.9
10-20	3831	19.8
20-30	4856	25.2
30-40	5034	26.1
40-50	2938	15.2
50-60	626.1	3.2
60-70	328.3	1.7
70-80	140.2	0.7
80-90	25.4	0.1
90-100	0.7	0.0

PICTURE (not to scale)



CONCLUSION

The results tabulated in this report are representative of the actual test samples submitted for this report only. The data is provided to the client for further evaluation. Compliance to the referenced specification requirements was not determined in this report.

In Charge Of Tests:



Ameet Alawi
Technician
Lighting Division

Attachment: None

Report Reviewed By:



Kenda Branch
Lighting Performance Team Lead
Lighting Division