


# DW CHORUS 48™

SKU# DW C048



## Photometric Data

Specifications are subject to change without any prior written notice.

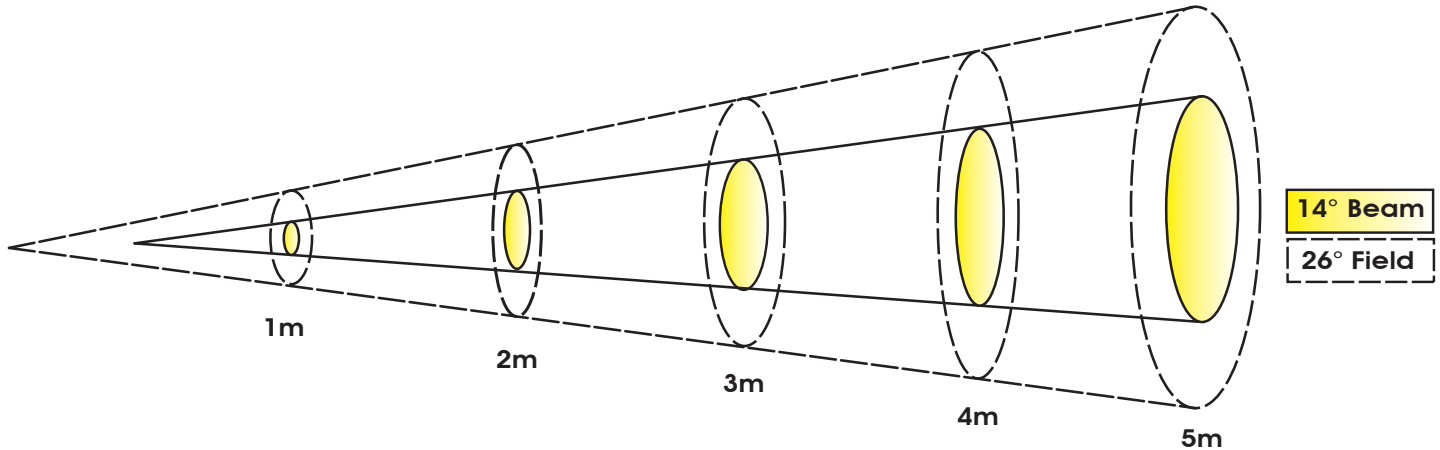

Distance	1m	3.3 ft	2m	6.6 ft	3m	9.8 ft	4m	13.1 ft	5m	16.4 ft
14° Beam Diameter	0.3	1.0	0.6	2.0	0.98	3.2	1.28	4.2	1.58	5.2
26° Field Diameter	0.47	1.5	0.9	3.0	1.35	4.4	1.79	5.9	2.23	7.3
<b>Photometrics</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>	<b>lux</b>	<b>fc</b>
COOL WHITE	24,475	2,274	13,108	1,218	7,283	677	4,598	427	3,072	285
WARM WHITE	15,672	1,456	9,194	854	5,108	475	3,084	287	2,021	188
FULL ON	32,644	3,033	16,842	1,565	9,514	884	5,942	552	3,998	371

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
 323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
 +31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu