


PIXEL BAR™
SYSTEM CONFIGURATION GUIDE

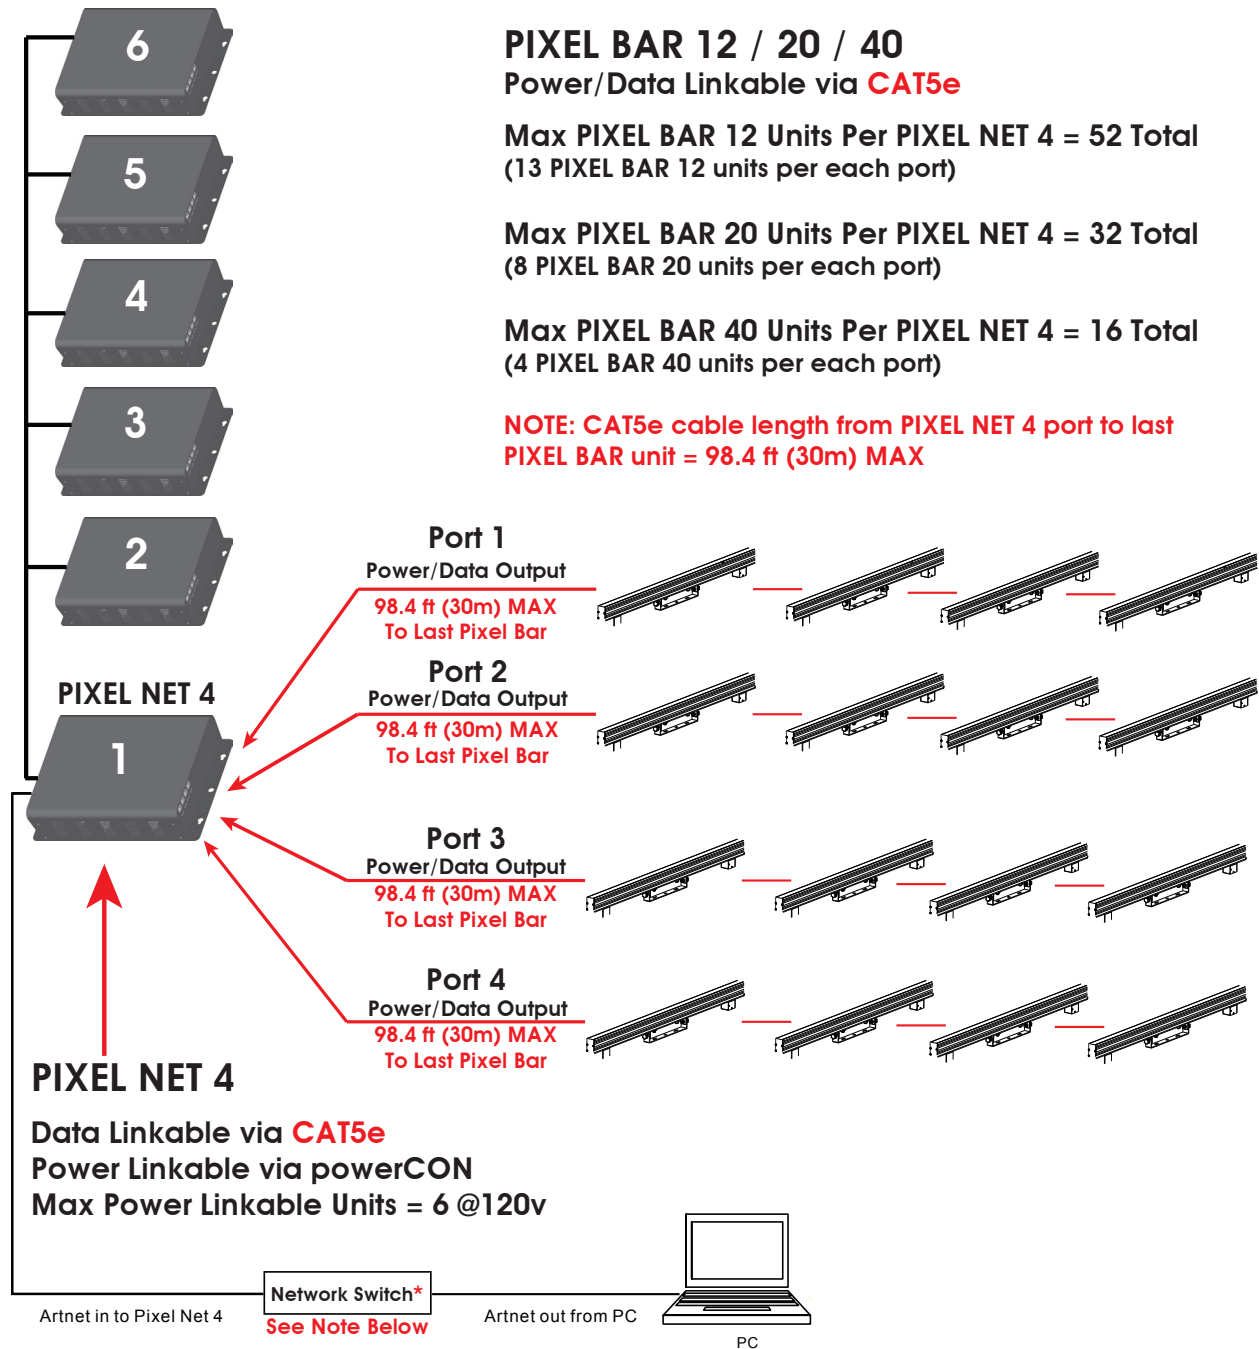

*When connecting PIXEL NET 4 devices to a Network Switch that is also controlling multiple other lighting devices, a Gigabit Ethernet Switch that supports IGMP (Internet Group Management Protocol) is strongly suggested. Using a Gigabit Ethernet Switch that does not support IGMP can cause erratic behavior of all connected devices. Click link below for more information about IGMP.

https://en.wikipedia.org/wiki/Internet_Group_Management_Protocol

Specifications are subject to change without notice ©Elation Professional 12/21/16

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu