



PRISMA DRIVER 8

SPECIFICATIONS / TECHNICAL DATA REV A

KEY FEATURES

48VDC Power Driver For Up To 8 PRISMA MINI UV LED Fixtures
2pin Bare Wire Block Terminal Connections (x8)
DMX512 And Manual Control



SPECIFICATIONS

Dynamic Effects

- . LCD Touch Display
- . Dimmer / Strobe Control
- . Primary/Secondary Modes

Control

- . DMX512 Protocol
- . DMX Modes: 3
- . DMX Channels: 8, 9, 12
- . RDM (Remote DMX) Protocol Support
- . Onboard 4 Button Touch Control Panel

Connections

- . Data Connectors: 5-pin XLR In/Out, 8 Driver
- . 2pin Bare Wire Block Terminal
- . In / Out Locking Power Connector

Construction / Physical / Performance

- . Dimensions (LxWxH): 8.90 x 7.40 x 3.19 in./ 226 x 188 x 81 mm
- . Weight: 5.73 lbs (2.6kg)

Electrical

- . Input Voltage: 100-240V AC, 50/60Hz
- . Amperage: 48V/8.3A
- . Power Consumption: 167w
- . Fuse: 4A/250V



PRISMA DRIVER 8


SPECIFICATIONS / TECHNICAL DATA REV A

Certifications / Qualifications / Thermal

- . IP Rating: IP20
- . Approvals: ROHS, CE
- . Cooling: Air Cooled
- . Maximum Temperature (Ambient): 113° F (45° C)
- . Minimum Temperature (Ambient): 14° F (-10° C)

What's Included

- . 14 AWG Locking Power Cable

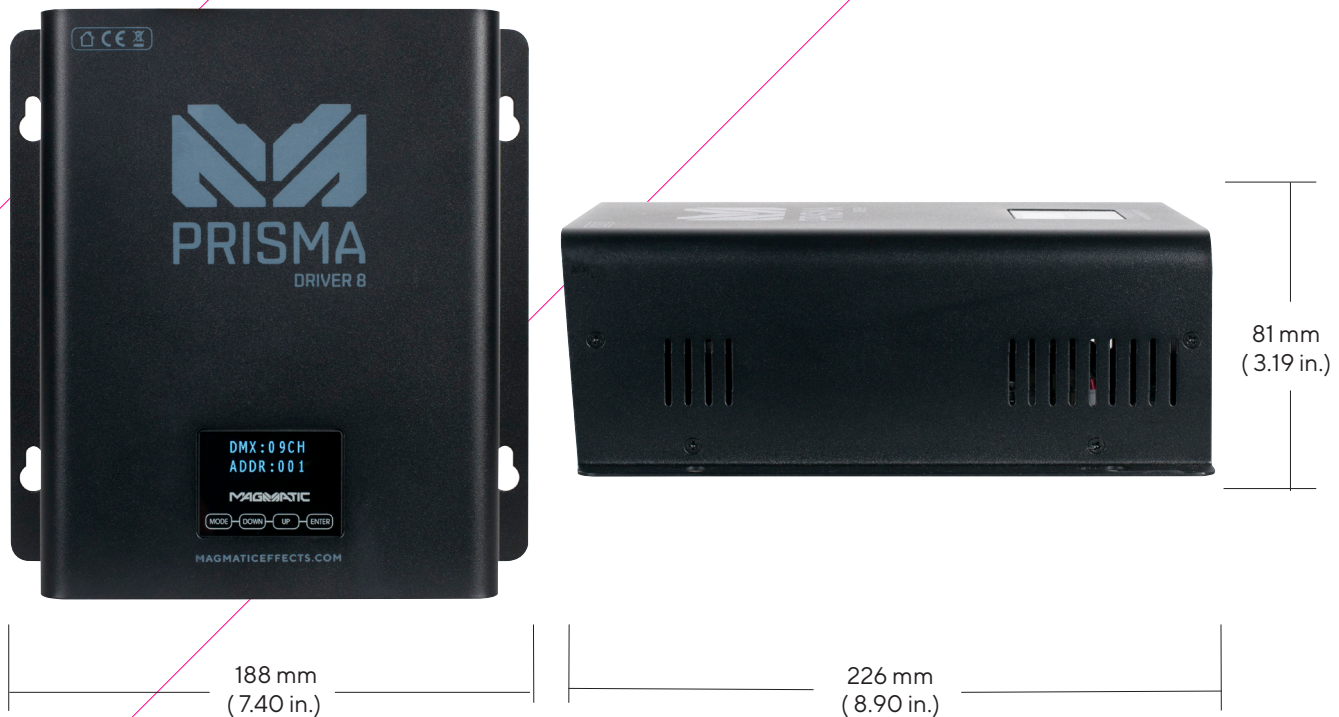

MAGMATIC