



## CUEPIX STRIP WW™

SKU# CUE277

The new CUEPIX Strip WW™ is a bar luminaire with (5) individual 30W Warm White 3,200K COB LEDs producing a 60° beam angle. Features include individual pixel control, strobe and zone chase effects, selectable dimming curves, DMX and RDM (Remote Device Management) support, 3/5pin XLR and power in/out connections, (4) button LCD menu display control, 123W max power consumption, and a multi-voltage universal auto switching power supply (100-240v).



### FEATURES

- 60° Beam Angle 3,200K Bar Luminaire**
- (5) Pixel Controlled 30W Warm White COB LEDs**
- Strobe and Zone Chase Effects**
- Selectable Dimming Curve Effects**
- DMX and RDM (Remote Device Management) Support**
- Flicker Free Operation for Broadcast TV and FILM**
- Integrated Rigging Bracket**
- Optional 15° Lens Kit Available**



Optional 15° Lens Kit



Specifications are subject to change without notice ©Elation Professional 07/15

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

**PRODUCT SPECIFICATIONS**

**SOURCE**

(5) 30W Warm White 3,200K COB LEDs  
100,000 Hour Average Lamp Life

**PHOTOMETRIC DATA (60° Full ON)**

2,990 LUX 278 FC @3.3' (1m)  
813 LUX 76 FC @6.6' (2m)  
500 LUX 46 FC @9.8' (3m)  
230 LUX 21 FC @13.1' (4m)  
148 LUX 14 FC @16.4' (5m)

**EFFECTS**

Individual Pixel Control  
Strobe and Zone Chase Effects  
Selectable Dimming Curves

**COLOR**

Warm White 3,200K

**CONTROL / CONNECTIONS**

(6) DMX Channel Modes (1 / 2 / 5 / 6 / 8 / 10)  
RDM (Remote Device Management)  
4 Button Touch Control Panel  
3pin/5pin DMX In/Out  
Power In/Out

**SIZE / WEIGHT**

Length: 21.6" (550mm)  
Width: 6.4" (161.2mm)  
Vertical Height: 6.8" (172.5mm)  
Weight: 13.9 lbs. (6.3 kg)

**ELECTRICAL / THERMAL**

AC 100-240V - 50/60Hz  
123W Max Power Consumption  
14°F to 113°F (-10°C to 45°C)

**APPROVALS / RATINGS**

CE | cETLus | IP20

**INSTALLATION**


Rigging: Clamps (Not Included)  
Working Position: Any (360°)

**INCLUDED ITEMS**

(1) Power Cable




**PHOTOMETRIC DATA**

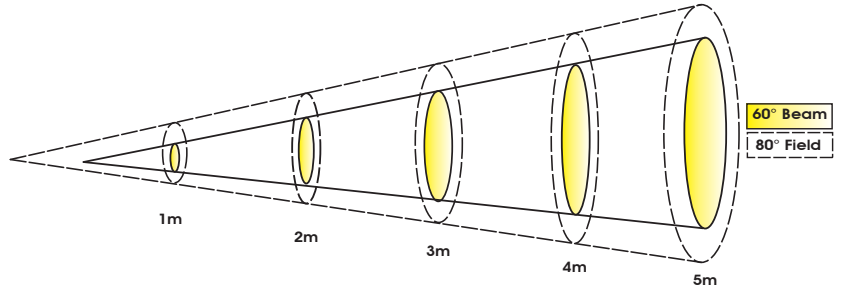

	1 m	3.3 ft	2 m	6.6 ft	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
60° Beam Diameter	1.7	5.6	2.4	7.9	3.5	11.5	4.6	15.1	5.8	19.0
80° Field Diameter	2.2	7.2	3.4	11.2	5	16.4	6.7	22.0	8.4	27.6
	lux	fc	lux	fc	lux	fc	lux	fc	lux	fc
FULL ON	2,990	278	813	76	500	46	230	21	148	14

**DIMENSIONAL DIAGRAMS**

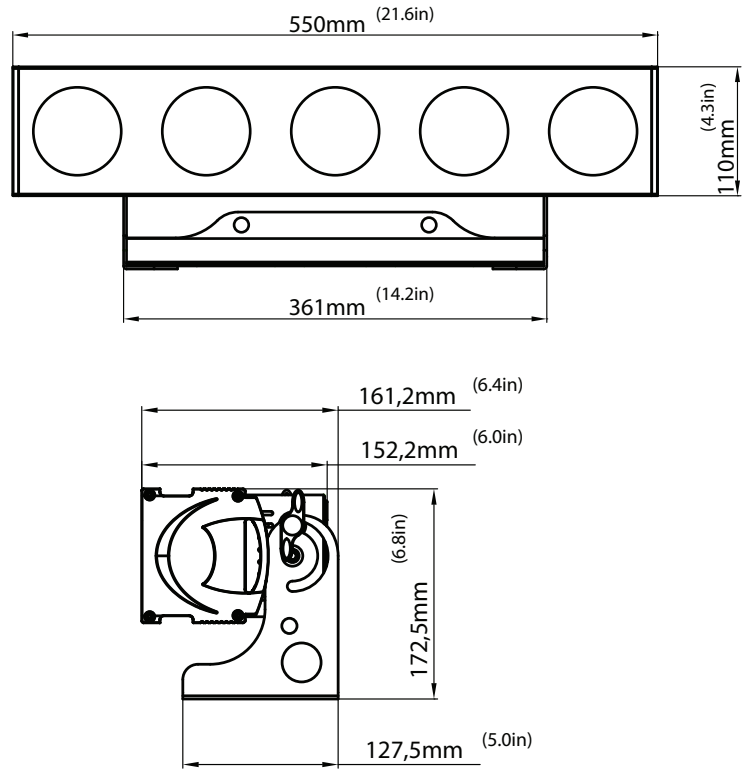

**OPTIONAL ACCESSORIES**

ORDER CODE	ITEM
CUE283/15LK	CUEPIX Strip TRI & WW 15 Degree Lens Kit
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
EWDMSYSTEM	Wireless DMX System (1 Transmitter, 1 Receiver)
PLC3	3' (1m) PRO Link Cable
AC3PDMX5PRO	5 ft. (1.5m) 3pin PRO DMX Cable
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
	Additional cable lengths available