

FUZE WASH 575™



The **FUZE WASH 575™** is a single source par moving head luminaire with a high output 350W Cool White / Daylight 6,800K 95CRI COB LED engine, 11° to 40° motorized zoom, smooth 16-bit pan and tilt movement, electronic strobe and selectable dimming curve effects, DMX and RDM (remote device management) protocol support, 5pin DMX and IP65 Locking Power Cable in/out connections, LCD menu display with 7 button control panel, multiple unit power linking, flicker free operation for TV and FILM, and a multi-voltage universal auto switching power supply (100-240v).

FEATURES

Cool White / Daylight Single Source Par Moving Head

High Output 95CRI 6,800K COB LED

11° to 40° Motorized Zoom Range

Smooth 16-Bit Pan and Tilt Movement

Variable Dimming Curve Modes

RDM (Remote Device Management)

Flicker Free Operation for TV and FILM

Multiple Unit Power Linking

Optional Snoot Lens



PRODUCT SPECIFICATIONS

SOURCE

350W 95CRI 6,800K Cool White / Daylight COB LED
50,000 Hour Average LED Life*

*LED life may vary depending on several factors including but not limited to:
Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

PHOTOMETRIC DATA

35,425 LUX 3,291 FC @6.6' (2m) (11° Full On)
6,502 LUX 604 FC @6.6' (2m) (40° Full On)
Zoom Range 11° - 40°
Beam Angle 10.6°- 41.2°
Field Angle 39.7°- 52.6°

EFFECTS

11° - 40° Motorized Zoom
Electronic Strobe
Variable Dimming Curve Modes

COLOR

Cool White / Daylight

CONTROL / CONNECTIONS

2 DMX Channel Modes (11 Total Channels)
7 Button Control Panel and LCD Menu Display
Smooth 16-Bit Pan and Tilt Movement
RDM (Remote Device Management)
5pin DMX and IP65 Locking Power Cable In/Out
Wired Digital Communication Network

SIZE / WEIGHT

Length: 13.3" (337.7mm)
Width: 9.0" (228.8mm)
Vertical Height: 18.33" (465.7mm)
Weight: 27.0 lbs. (12.2kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
425W Max Power Consumption
Multiple Unit Power Linking
5°F to 113°F (-15°C to 45°C)
BTU/hr (+/- 10%) 1449.25

INCLUDED ITEMS

Omega Brackets
IP65 Locking Power Cable

APPROVALS / RATINGS


CE | cETLus | IP30




ORDERING INFORMATION

FUZ761	FUZE WASH 575
*** TBD ***	FUZE WASH 575 4-PACK Road Case
FW120SNOOT	FUZE WASH 575 Snoot (Height 2.75" / 69.9mm)
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable (Additional cable lengths available)
NEU088	3 ft. (1m) IP65 Power Link Cable

PHOTOMETRIC DATA

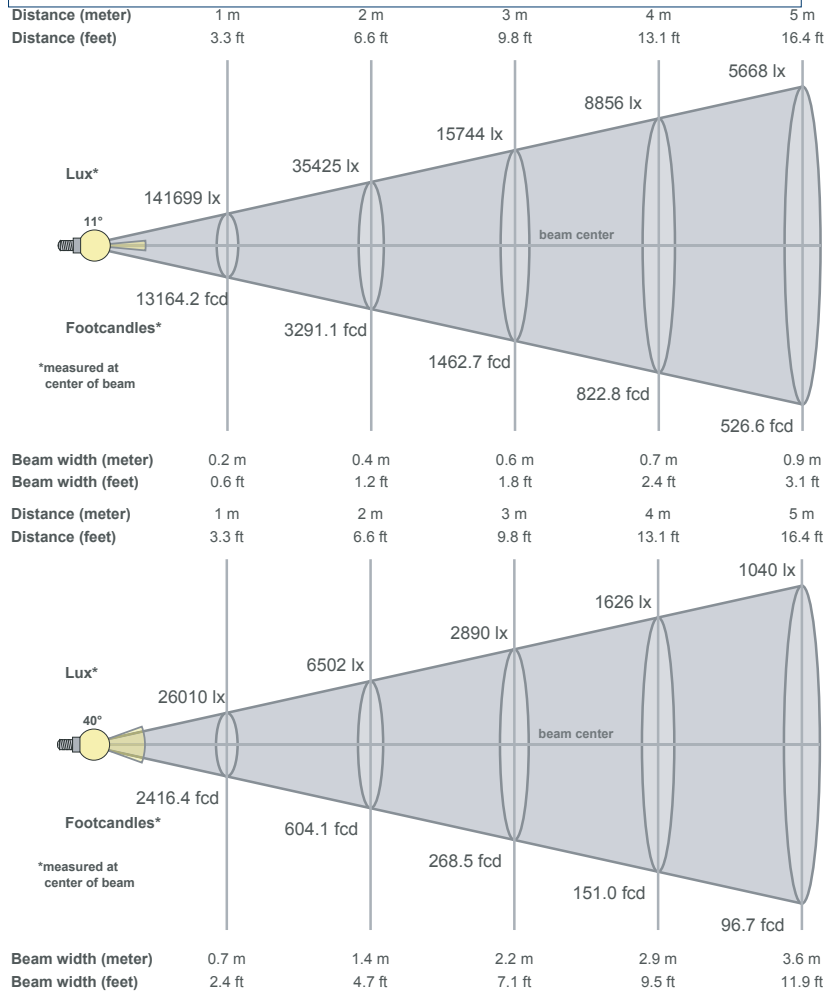

DIMENSIONAL DIAGRAMS

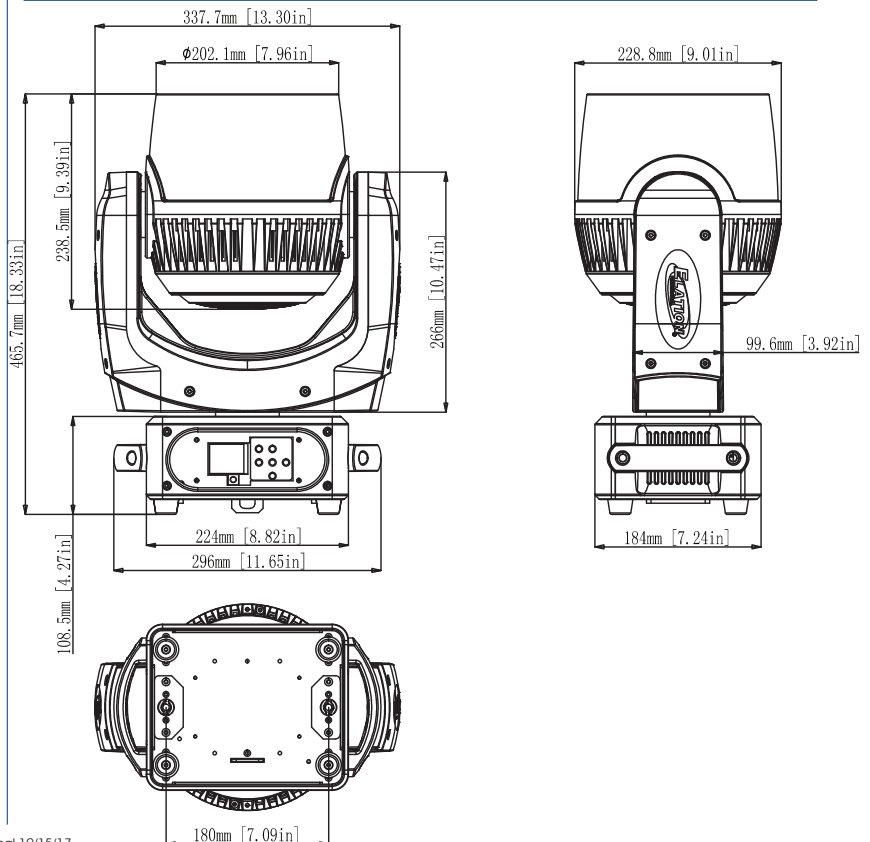

Specifications subject to change without notice ©Elation Professional 10/15/17

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu