

eNODE 8 PRO™



The **eNode 8 PRO™** is a 1U rack space 8-universe Ethernet-DMX node which supports Art-Net, sACN, and RDM compatible DMX control systems utilizing 2 RJ45 ethernet auto-switching 10/100Mbps inputs and 8 5pin DMX ports which can be configured as inputs or outputs. Features include DMX bilateral conversion support, sACN auto-detection, variable MAC address assignable, auto MDI/MDIX, DMX splitter function (1 input / 3 outputs or 1A input / 3A outputs and 1B input / 3B outputs), broadcast and backup modes, built-in Ethernet repeater switch, an LCD control menu display and LED indicators, push button configuration encoder wheel, a lightweight die-cast aluminum housing, and includes standard 19-inch rack mount ears.



FEATURES

8-Universal Ethernet-DMX Node

DMX, RDM, Art-Net, and sACN Protocol Support

DMX Bilateral Conversion Support Compact

sACN Auto-Detection

Variable MAC Address Assignable


Auto MDI/MDIX

DMX Splitter Function (1 Input / 3 Outputs)

Broadcast Mode(One Device Transmits Same Signal to Other Connected Devices)

Backup Mode

1U Rack Space Mountable (rack ears included)



PRODUCT SPECIFICATIONS

CONTROL / CONNECTIONS

8-Universes
 DMX, RDM, Art-Net, and sACN Protocol Support
 DMX Bilateral Conversion
 sACN Auto-Detection
 Auto MDI/MDIX
 DMX Splitter Function (1 Input / 3 Outputs)
 Broadcast Mode (One Device Transmits Same Signal to Other Connected Devices)
 Backup Mode
 Push Button Configuration Encoder Wheel
 LCD Control Menu Display & LED Indicators
 (2) RJ45 ethernet TCP/IP 10/100M Inputs
 (8) Universal 5pin DMX Ports (Input or Output)
 Power In

SIZE / WEIGHT

Length: 19.0" (482mm)
 Width: 6.3" (160mm)
 Vertical Height: 1.7" (44mm)
 Weight: 4.6 lbs. (2,1kg)




ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
 7W Max Power Consumption
 35.6°F (2°C) to 113°F (45°C)

APPROVALS



DIMENSIONAL DRAWING

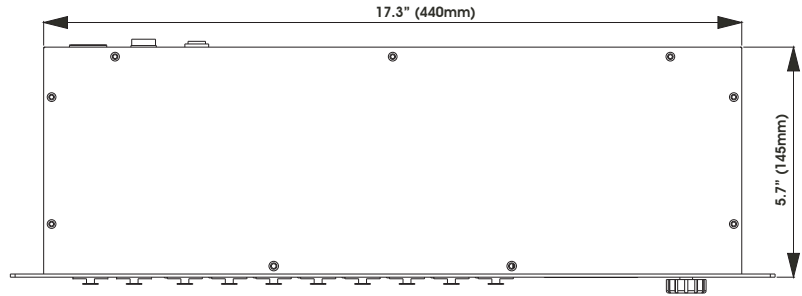

ORDERING INFORMATION

ENO417	eNODE 8 PRO™
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
CAT6PRO5	5 ft. (1.5m) CAT6 PRO Ethernet Cable
	Additional cable lengths available