



## IPC415™



The IPC415™ is an intelligent DMX power control center, featuring (4) power outputs (15A max each), (4) 5pin XLR DMX outputs, (1) 5pin XLR DMX input, and (1) 5pin XLR DMX thru-put, and a multi-voltage universal auto switching power supply (100-240v). Power to the power outputs can be scheduled to automatically switch ON/OFF via an internal scheduler when DMX signal is lost or when a specific cue is triggered from a DMX console. The IPC415 can be mounted in a standard 19-inch rack space using the included rack ears, or truss mounted using a clamp (not included) attached to the M10 rigging point in the center of the unit.

### FEATURES

**2 DMX Control Modes (1 / 4)**

**Internal On/Off Scheduler**

**(1) 5pin XLR DMX Input**

**(1) 5pin XLR DMX Output Thru-Put**

**(4) 5pin XLR DMX Outputs**

**(4) power Outputs (NAC3MPB-1)**

**Main 20 amp Power Switch**

**power Power Input (NAC3MPA-1)**

**19-Inch Rack Mount Ears (included)**

**M10 Rigging Center Point for Truss Mounting\*  
(clamp not included)**



**SPECIFICATIONS**

**CONTROL / CONNECTIONS**

- (2) DMX Channel Modes (1 / 4)
- Push Button / Encoder Wheel
- Internal On/Off Scheduler
- OLED Control Menu Display
- 5pin XLR DMX Input
- 5pin XLR DMX Output (Thru-put)
- (4) 5pin XLR DMX Outputs
- (4) power 15 amp Outputs (NAC3MPB-1) Main
- 20 amp Power Switch
- power Power Input (NAC3MPA-1)

**SIZE / WEIGHT**

- Length: 19.0" (482mm)
- Width: 9.1" (232mm)
- Vertical Height: 1.7" (44mm)
- Weight: 6.6 lbs. (3.0kg)

**ELECTRICAL / THERMAL**

- AC 100-240V - 50/60Hz
- 7W Max Power Consumption (No Devices Connected)
- 35°F (2°C) to 113°F (45°C)

**APPROVALS**



CE



**INCLUDED ACCESSORIES**

- Rack Ears (fits standard 19-inch single rack space)
- M10 Screw Hole for Clamp (clamp not included)
- Safety Cable Loop (cable not included)

**DIMENSIONS**

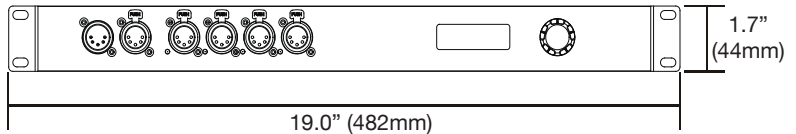

**TRUSS MOUNTABLE (clamp not included)**



**ORDERING INFORMATION**

ORDER CODE	ITEM
IPC415	Intelligent DMX Power Control Center
PRO-CLAMP	Heavy Duty 2 inch Pro Clamp
SCABLE60	Safety Cable 24" (610mm) 60 lbs. (27kg) Rating
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
PLC10	10 ft. (3m) power Link Cable
	Additional Cable Lengths Available



Specifications are preliminary subject to change without notice ©Elation Professional 01/28/19

Elation Professional USA - Corporate Headquarters | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu