



WW PROFILE™

SKU# **WWP001**

The new WW Profile™ Ellipsoidal features a 130W Warm White 3,000K LED engine, >94CRI, high efficiency offering 6,700 total lumens (with 26° lens) with only 160W max power consumption (42 lumens per watt), 19°, 26°, 36°, and 50° interchangeable lens options (sold separately), (4) blade manual framing shutters, supports B size metal or HT transparency gobos, manual focus, DMX controlled electronic strobe, dimming, and dimming curves, flicker free operation for TV and FILM, adjustable refresh frequency and gamma brightness, 3/5pin DMX and power in/out connections, (4) button LCD control display panel, an integrated rigging yoke, quiet fan cooling, and a multi-voltage universal auto switching power supply (100-240v).



FEATURES

130W Warm White 3,000K LED Engine

>94CRI, 6,700 Total Lumens*

160W Max Power Consumption / 42 Lumens Per Watt

Interchangeable Lens Options 19°, 26°, 36°, 50°**

(4) Blade Manual Framing Shutters

Supports B Size Metal or HT Transparency Gobos***

Electronic Strobe and Variable Dimming Curves

Flicker Free Operation for TV and FILM

Adjustable Refresh Frequency and Gamma Brightness

Quiet Fan Cooling

(*with 26° lens) (sold separately)(***gobos and holder not included)**



ELATION | WW PROFILE™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional 2/19/16

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

SOURCE

130W Warm White 3,000K LED Engine
50,000 Hour Average LED Life*

*LED Life may vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

PHOTOMETRIC DATA

>94CRI, 6,700 Total Lumens*
(*with 26° lens)

EFFECTS

Electronic Strobe and Dimming
Variable Dimming Curve Modes

GOBOS

Supports "B" Size Metal, HT Transparency Gobos*
*Gobos and Holder not included.

CONTROL / CONNECTIONS

2 DMX Channel Modes (1 / 4)
Adjustable Refresh Rate (900-1500, 25,000 Hz)
Adjustable Gamma Brightness (2.0, 2.2, 2.4, 2.8)
4 Button Control Panel / LED Menu Display
3/5pin DMX In/Out / power In/Out

SIZE / WEIGHT

Length: 24.3" (618mm) / 26.5" (674mm) Fully Extended
Width: 12.2" (310mm)
Vertical Height: 15.7" (398mm)
Weight: 21.0 lbs. (9.5 kg)

ELECTRICAL / THERMAL

Quiet Fan Cooling
AC 100-240V - 50/60Hz
160W Max Power Consumption
14° to 113°F (-10° to 45°C)

APPROVALS / RATINGS

CE | cETLus | IP20



INSTALLATION

Rigging: Integrated Yoke
Working Position: Any (360°)

INCLUDED ITEMS


- (1) Locking Power Cable
- (1) 3pin DMX Cable

LENS Options (sold separately)


19°, 26°, 36°, 50°




PHOTOMETRIC DATA

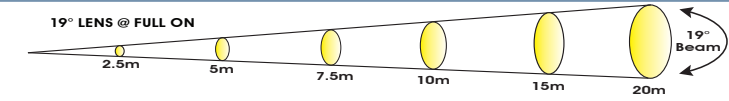


m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	
2.5	8.2	5	16.4	7.5	24.6	10	32.8	15	49.2	20	65.6	
Diameter	0.79	2.6	1.61	5.3	2.43	8.0	3.21	10.5	4.8	15.7	6.4	21.0
Photometrics	17,450	1,621	4,077	379	1,797	167	1,047	97	499	46	312	29

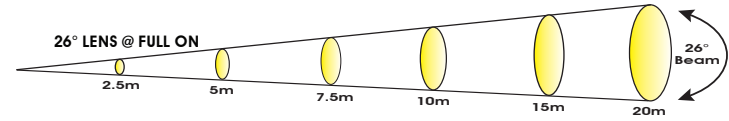

m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	
2.5	8.2	5	16.4	7.5	24.6	10	32.8	15	49.2	20	65.6	
Diameter	1.14	3.7	2.25	7.4	3.45	11.3	4.6	15.1	6.9	22.6	9.2	30.2
Photometrics	7,818	726	2,000	186	961	89	597	55	294	27	160	15

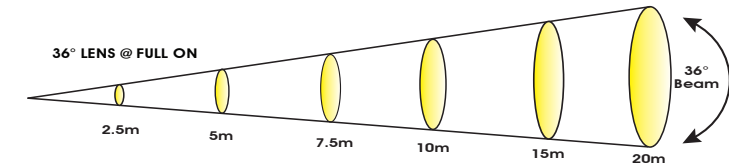


m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	
2.5	8.2	5	16.4	7.5	24.6	10	32.8	15	49.2	20	65.6	
Diameter	1.5	4.9	3	9.8	4.51	14.8	6.01	19.7	9	29.5	11.9	39.0
Photometrics	5,319	494	1,395	130	634	59	389	36	195	18	120	11

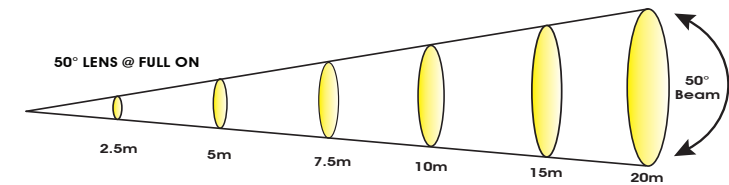

m	ft	m	ft	m	ft	m	ft	m	ft	m	ft	
2.5	8.2	5	16.4	7.5	24.6	10	32.8	15	49.2	20	65.6	
Diameter	2.13	7.0	4.24	13.9	6.37	20.9	8.49	27.9	12.7	41.7	16.98	55.7
Photometrics	1,982	184	563	52	268	25	152	14	74	7	45	4

DIMENSIONAL DIAGRAM

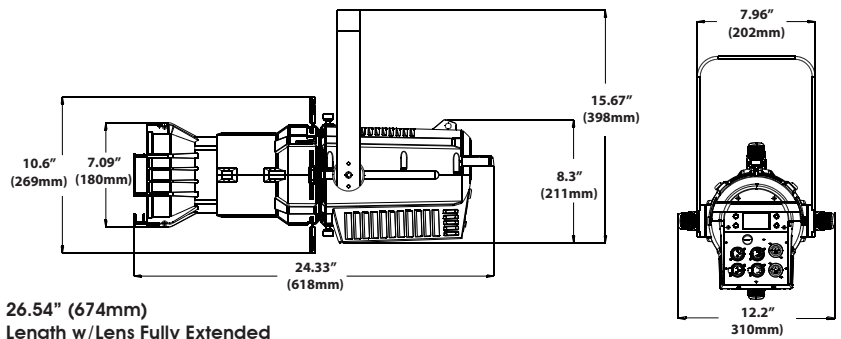

26.54" (674mm)
Length w/Lens Fully Extended

OPTIONAL ACCESSORIES

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
PHD019	Profile High Definition Lens 19°
PHD126	Profile High Definition Lens 26°
PHD236	Profile High Definition Lens 36°
PHD350	Profile High Definition Lens 50°
AC3PDMX5PRO	3 ft. (1m) PRO Link Cable
AC3PDMX5PRO	5 ft. (1.5m) 3pin PRO DMX Cable
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable



Specifications are subject to change without notice ©Elation Professional 2/19/16

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu