



## ZCL 360i™

SKU# ZCL301

The ZCL 360i™ is a powerful single beam moving effect luminaire with zoom featuring a single 90W RGBW 4-in-1 LED and the new advanced collimator optic lens, which produces a laser-like homogenized 4° color-changing beam. Features 4° to 44° motorized zoom, fast and precise 16-bit continuous full 360° pan and tilt rotation, electronic strobe, dimmer, and selectable dimming curve effects, DMX, RDM (Remote Device Management), KlingNET™ and Art-NET support, 5pin XLR, RJ45 ethernet, and Locking Power Cable in/out connections, (7) button control full color 180° reversible menu display, multiple unit power linking, flicker free operation for TV and FILM, and a multi-voltage universal auto switching power supply (100-240v).

### FEATURES

- 4° Single Beam Moving Effect Luminaire with Zoom
- 90W RGBW 4-in-1 LED
- 4° to 44° Motorized Zoom
- New Advanced Collimator Optic Lens
- Laser-Like Homogenized Color Changing Beam
- Fast and Precise 16-Bit Continuous 360° Pan/Tilt Rotation
- Strobe and Selectable Dimming Curve Effects
- 64 Color Presets and 14 Unique Color Macros
- Flicker Free Operation for Broadcast TV and FILM
- DMX, RDM, KlingNET™ and Art-NET (DMX Over Ethernet)



**PRODUCT SPECIFICATIONS**

**SOURCE**

90W RGBW 4-in-1 LED

100,000 Hour Average LED Life\*

\*LED Life may vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control and Dimming.

**PHOTOMETRIC DATA**

11,123 LUX 1,033 FC @9.8' (3m) (4° Min Zoom) Full ON

483 LUX 45 FC @9.8' (3m) (44° Max Zoom) Full ON

**EFFECTS**

RGBW Color Mixing

4° - 44° Beam Zoom Range

Variable Dimming Curves

Electronic Strobe and Dimming (0% - 100%)

64 Color Presets and 14 Unique Color Macros

**COLOR**

RGBW

**CONTROL / CONNECTIONS**

(3) DMX Channel Modes (21 Total Channels)

RDM (Remote Device Management)

(7) Button Touch Control Panel

Full Color 180° Reversible LCD Menu Display

8 / 16 Bit Resolution Adjustable Movement

Spin DMX In/Out

RJ45 ethernet In/Out (KlingNET™ / Art-NET)

Locking Power Cable In/Out

**SIZE / WEIGHT**

Length: 8.74" (222.1mm)

Width: 7.31" (186mm)

Vertical Height: 13.22" (336mm)

Weight: 12.0 lbs. (5.4 kg)

**ELECTRICAL / THERMAL**

AC 100-240V - 50/60Hz

101W Max Power Consumption

5F to 113°F (-15°C to 45°C)

**INCLUDED ITEMS**

Omega Bracket

Locking Power Cable

**APPROVALS / RATINGS**



Intertek  
4010765

**OPTIONAL ACCESSORIES**

ORDER CODE	ITEM
TRIGGER CLAMP	Heavy Duty Wrap Around Hook Style Clamp
DRC360I	8-Pack Road Case For ZCL 360i™
PLC3	3' (1m) Locking Power PRO Link Cable
CAT6PRO5	5' (1.5m) CAT6 Ethernet Cable
ACSPDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
	Additional cable lengths available

**PHOTOMETRIC DATA**


**MIN ZOOM - 4° Beam Diameter**

	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
4° Beam Diameter	0.24	0.8	0.33	1.1	0.41	1.3
9° Field Diameter	0.5	1.6	0.68	2.2	0.85	2.8
	lux	fc	lux	fc	lux	fc
RED LEDs	1,614	150	816	76	504	47
GREEN LEDs	4,185	389	1,708	159	1,317	122
BLUE LEDs	651	60	373	35	214	20
WHITE LEDs	5,851	544	3,607	335	2,082	193
FULL ON	11,123	1,033	6,296	585	4,027	374

**MAX ZOOM - 44° Beam Diameter**

	3 m	9.8 ft	4 m	13.1 ft	5 m	16.4 ft
44° Beam Diameter	2.47	8.1	3.29	10.8	4.12	13.5
70° Field Diameter	4.2	13.8	5.6	18.4	7.1	23.3
	lux	fc	lux	fc	lux	fc
RED LEDs	71	7	25	2	9	1
GREEN LEDs	125	12	45	4	13	1
BLUE LEDs	28	3	10	1	5	0
WHITE LEDs	231	21	103	10	45	4
FULL ON	483	45	226	21	209	19

**DIMENSIONAL DIAGRAMS**

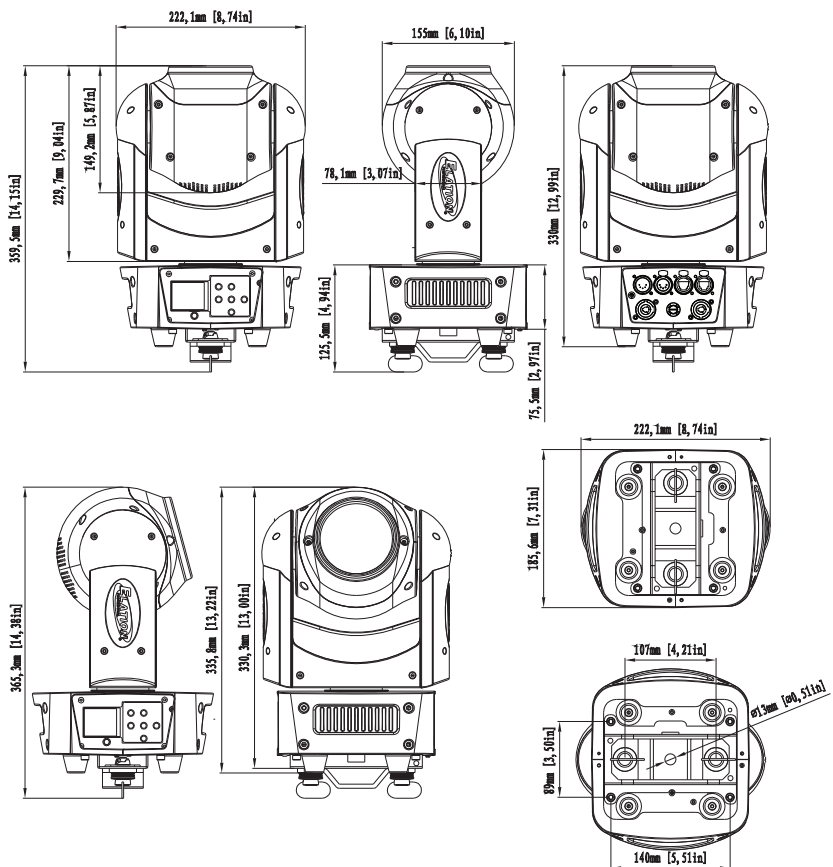

Specifications are subject to change without notice ©Elation Professional 08/12/16

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu