



## VOLT Q5E SIX PACK™

SKU# VOL106

The new Volt Q5E Six Pack™ charging road case includes (6) IP65 rated Volt Q5E™ units, each having (5) 10W QUAD color RGBW LEDs, 9° beam 17° field angles, 180°+ manual LED head positioning, variable color correction (2,700K - 7,200K), magnetic frost filter gel frame, electronic strobe and dimming curves, flicker free operation for TV and FILM, rugged die-cast aluminum exterior, rubber padded base, retractable carrying handle, an internal wireless EWDMX receiver, and powered by a rechargeable Lithium-Ion battery.

### VOLT Q5E™ FEATURES

- IP65 Rated, 9° Beam 17° Field Angles**
- (5) 10W QUAD Color RGBW LEDs**
- 180°+ Manual LED Head Positioning**
- Variable Color Correction (2,700K - 7,200K)**
- Magnetic Frost Filter Gel Frame**
- Electronic Strobe and Dimming Curves**
- Internal Wireless EWDMX Receiver**
- Rechargeable Lithium-Ion Battery**
- Flicker Free Operation for TV and FILM**
- Rugged Die-Cast Aluminum Exterior**
- Rubber Padded Base and Retractable Carrying Handle**

### VOLT Q5™ CHARGING ROAD CASE FEATURES

- Charges (6) Volt Q5E™ Units**
- Charge Status Windows for each unit**



ELATION | VOLT Q5E SIX PACK™ | Product Specification Sheet

Specifications are subject to change without notice ©Elation Professional

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

**PRODUCT SPECIFICATIONS**

**VOLT Q5E™**

**FEATURES**

IP65 Rated, 9° Beam and 17° Field Angles  
 180°+ Manual LED Head Positioning  
 Variable Color Correction (2,700K - 7,200K)  
 Internal Wireless EWDMX Receiver  
 Rechargeable Lithium-Ion Battery  
 Flicker Free Operation for TV and FILM  
 Rugged Die-Cast Aluminum Exterior  
 Rubber Padded Base and Retractable Carrying Handle

**SOURCE**

(5) 10W QUAD Color RGBW LEDs  
 100,000 Hour Average Life

**PHOTOMETRIC DATA**

38,450 LUX 3,572 FC @3.3 ft (1m) (9° Full ON)

**EFFECTS**

Variable Color Correction (2,700K - 7,200K)  
 Magnetic Frost Filter Gel Frame  
 Electronic Strobe and Dimming Curves  
 Multiple Color and Chase Macros

**CONTROL / CONNECTIONS**

(4) DMX Channel Modes (4 / 5 / 11 / 12)  
 Internal Wireless EWDMX Receiver  
 (4) Button Control Panel  
 LCD Menu Display  
 3pin IP DMX In/Out, 2pin IP Power Charger In

**SIZE / WEIGHT (single unit)**

Length: 11.4" (290mm)  
 Width: 9.9" (252mm)  
 Vertical Height: 11.4" (289mm)  
 Weight: 15.0 lbs. (6.8 kg)

**ELECTRICAL / THERMAL**

DC 22-26.2V  
 70W Max Power Consumption (each unit)  
 14°F to 113°F (-10°C to 45°C)

**APPROVALS / RATINGS**

CE | cETLus | IP65

**VOLT Q5™ CHARGING ROAD CASE**

**FEATURES**

Charges (6) Volt Q5™ Units  
 Charge Status Windows for each unit

**SIZE / WEIGHT (loaded case with 6 units)**

Length: 44.0" (1118mm)  
 Width: 22.0" (560mm)  
 Vertical Height: 21.6" (548mm)  
 Loaded Weight: 240.0 lbs. (109 kg)

**ELECTRICAL / THERMAL**


Max Power Consumption: 265W  
 In-Rush Current: 325W  
 14°F to 113°F (-10°C to 45°C)



**INCLUDED ITEMS**

(6) Volt Q5E™ Units, (6) IP to DMX Data Input Cables  
 (6) Omega Brackets, (6) Magnetic Frost Filters, (1)  
 Locking Power Cable


**PHOTOMETRIC DATA**

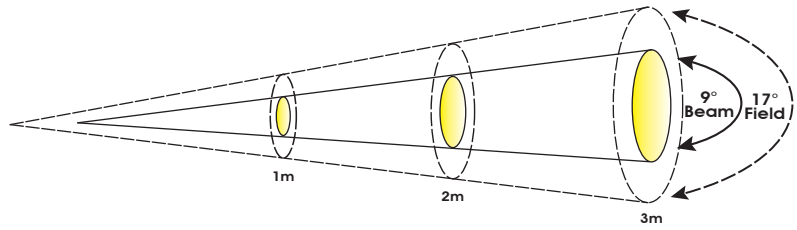

|                    | m    | ft  | m    | ft  | m    | ft  |
|--------------------|------|-----|------|-----|------|-----|
| Distance           | 1    | 3.3 | 2    | 6.6 | 3    | 9.8 |
| 9° Beam Diameter   | 0.17 | 0.6 | 0.34 | 1.1 | 0.51 | 1.7 |
| 17° Field Diameter | 0.31 | 1.0 | 0.62 | 2.0 | 0.93 | 3.1 |

| Photometrics | lux    | fc    | lux    | fc  | lux   | fc  |
|--------------|--------|-------|--------|-----|-------|-----|
| RED LEDs     | 8,100  | 752   | 2,080  | 193 | 940   | 87  |
| GREEN LEDs   | 11,970 | 1,112 | 3,270  | 304 | 1,488 | 138 |
| BLUE LEDs    | 1,660  | 154   | 470    | 44  | 212   | 20  |
| WHITE LEDs   | 20,790 | 1,931 | 5,345  | 497 | 2,430 | 226 |
| FULL ON      | 38,450 | 3,572 | 10,320 | 959 | 4,710 | 438 |

**DIMENSIONAL DIAGRAMS**

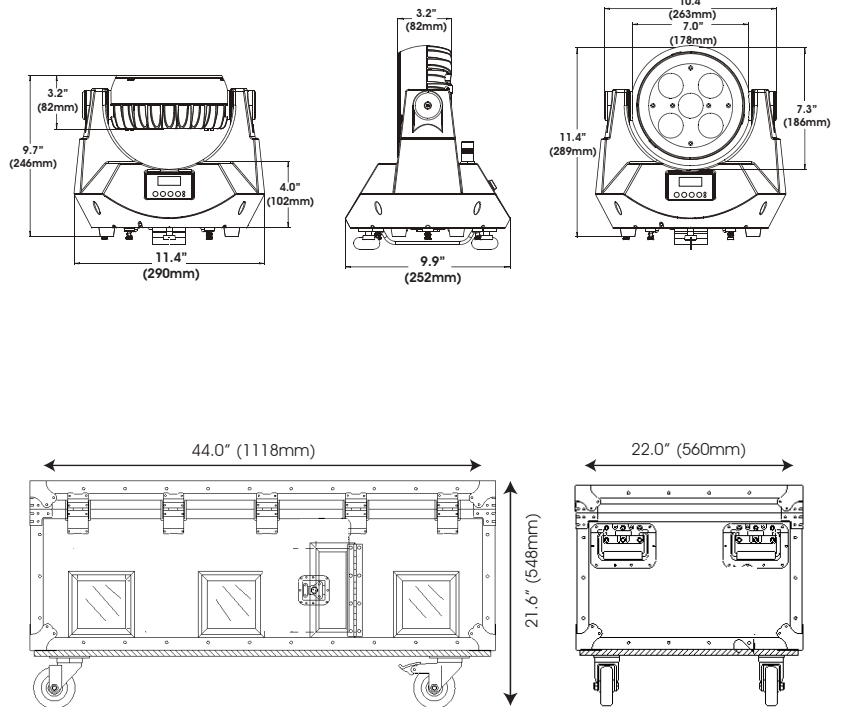

**OPTIONAL ACCESSORIES**

| ORDER CODE    | ITEM  |
|---------------|---|
| TRIGGER CLAMP | Heavy Duty Wrap Around Hook Style Clamp                                     |
| EWDD001       | EWDMX IP Wireless IP65 DMX Transceiver                                      |
| VOLT/3MDLC    | Volt Series 9.8 ft (3m) 3pin IP Male to 3pin IP Female DATA LINK Cable      |
| VOLT/DIAC     | Volt Series 9.8 ft (3m) 3pin IP Female to 3pin DMX Male DATA INPUT Cable    |
| VOLT/DOAC     | Volt Series 9.8 ft (3m) 3pin IP Female to 3pin DMX Female DATA Output Cable |
| VOLT113       | Volt Q5 Six Pack Charging Road Case (Empty Case Only)                       |

