

**ELATION® PLATINUM WASH ZFX PRO XL™**  
**DMX Channel Values / Functions (160 DMX Channels)**

Specifications are subject to change without any prior written notice.

MODE/CHANEL			VALUE	FUNCTION
STAND	BASIC	EXTEND		
1	1	1		<b>PAN MOVEMENT [8 Bit]</b>
			0-255	PAN Movement
2	2			<b>PAN FINE MOVEMENT [16 Bit]</b>
			0-255	Fine Control Of PAN Movement
3	3	2		<b>TILT MOVEMENT [8 Bit]</b>
			0-255	TILT Movement
4	4			<b>TILT FINE MOVEMENT [16 Bit]</b>
			0-255	Fine Control Of TILT Movement
5	5	3		<b>SPEED PAN/TILT MOVEMENT</b>
			0-225	MAX to MIN Speed Adjustment
			226-235	BLACKOUT by Movement
6	6	4		<b>ZOOM</b>
			0-255	ZOOM
				<b>ZOOM FINE</b>
7			0-255	ZOOM FINE Adjustment
				<b>SHUTTER, STROBE</b>
8	7	5	0-31	Shutter CLOSED, ALL LEDs OFF
			32-63	NO Function (Shutter OPEN), ALL LEDs ON
			64-95	Strobe Effect SLOW to FAST
			96-127	NO Function (Shutter OPEN), ALL LEDs ON
			128-159	Pulse Effect In Sequences
			160-191	NO Function (Shutter OPEN), ALL LEDs ON
			192-223	Random Strobe Effect SLOW to FAST
224-255	NO Function (Shutter OPEN), ALL LEDs ON			
9	8	6		<b>DIMMER INTENSITY</b>
			0-255	Intensity 0 to 100%
10	9	7		<b>CHASE MACROS</b>
			1-14	LEDs OFF
			15-30	Chase Macro 1
			31-46	Chase Macro 2
			47-62	Chase Macro 3
			63-78	Chase Macro 4
			79-94	Chase Macro 5
			95-110	Chase Macro 6
			111-126	Chase Macro 7
			127-142	Chase Macro 8
			143-158	Chase Macro 9
			159-174	Chase Macro 10
			175-190	Chase Macro 11
			191-206	Chase Macro 12
			207-222	Chase Macro 13
223-238	Chase Macro 14			
239-255	Chase Macro 15			
11	10	8		<b>CHASE SPEED</b>
			0-125	FAST to SLOW - Counter Clockwise
			126-130	STOP (Speed = 0)
12	11	9		<b>CHASE FADE</b>
			131-255	SLOW to FAST - Clockwise
			0-255	Chase FADE
13	12	10		<b>COLOR TEMPERATURE</b>
			0-31	NO Function
			32-63	WHITE 2700k
			64-95	WHITE 3200k
			96-127	WHITE 4300k
			128-159	WHITE 5600k
			160-191	WHITE 6500k
192-223	WHITE 8000k			
224-255	LEDs OFF			
14	13	11		<b>COLOR MODE</b>
			0-189	NO Function
			190-254	Edit A New White Balance
			255	Store A New White Balance

**ELATION** | **PLATINUM WASH ZFX PRO XL™** | dmx traits

**ELATION® PLATINUM WASH ZFX PRO XL™**  
**DMX Channel Values / Functions (160 DMX Channels)**

Specifications are subject to change without any prior written notice.

MODE/CHANNEL			VALUE	FUNCTION
STAND	BASIC	EXTEND		
		12		<b>RESET INTERNAL PROGRAMS</b>
			0-79	Normal
			80-84	RESET - All Motors
			85-87	RESET - Scan Motors Only
			88-90	NO Function
			91-93	STORE White Balance Enabled
			94-96	NO Function
			97-99	RESET - All Other Motors
			100-119	Internal Program 1 (Scene 1 - 8)
			120-139	Internal Program 2 (Scene 9 - 16)
			140-159	Internal Program 3 (Scene 17 - 24)
			160-179	Internal Program 4 (Scene 25 - 32)
			180-199	Internal Program 5 (Scene 33 - 40)
			200-219	Internal Program 6 (Scene 41 - 48)
			220-239	Internal Program 7 (Scene 49 - 56)
			240-255	Sound Control (Scene Of Program 1)
15				<b>RED LED - All LEDs [1-37] STANDARD MODE</b>
			0-255	Red (0-Black - 255-100%)
16				<b>GREEN LED - All LEDs [1-37] STANDARD MODE</b>
			0-255	Green (0-Black - 255-100%)
17				<b>BLUE LED - All LEDs [1-37] STANDARD MODE</b>
			0-255	Blue (0-Black - 255-100%)
18				<b>WHITE LED - All LEDs [1-37] STANDARD MODE</b>
			0-255	White (0-Black - 255-100%)
		12		<b>RESET INTERNAL PROGRAMS</b>
			0-79	Normal
			80-84	RESET - All Motors
			85-87	RESET - Scan Motors Only
			88-90	NO Function
			91-93	STORE White Balance Enabled
			94-96	NO Function
			97-99	RESET - All Other Motors
			100-119	Internal Program 1 (Scene 1 - 8)
			120-139	Internal Program 2 (Scene 9 - 16)
			140-159	Internal Program 3 (Scene 17 - 24)
			160-179	Internal Program 4 (Scene 25 - 32)
			180-199	Internal Program 5 (Scene 33 - 40)
			200-219	Internal Program 6 (Scene 41 - 48)
			220-239	Internal Program 7 (Scene 49 - 56)
			240-255	Sound Control (Scene Of Program 1)
	14			<b>RED LED [1] BASIC MODE</b>
			0-255	Red (0-Black - 255-100%)
		13		<b>RED LED [1] EXTENDED MODE</b>
			0-256	Red (0-Black - 255-100%)
	15			<b>GREEN LED [1] BASIC MODE</b>
			0-255	Green (0-Black - 255-100%)
		14		<b>GREEN LED [1] EXTENDED MODE</b>
			0-256	Green (0-Black - 255-100%)
	16			<b>BLUE LED [1] BASIC MODE</b>
			0-255	Blue (0-Black - 255-100%)
		15		<b>BLUE LED [1] EXTENDED MODE</b>
			0-256	Blue (0-Black - 255-100%)
	17			<b>WHITE LED [1] BASIC MODE</b>
			0-255	White (0-Black - 255-100%)
		16		<b>WHITE LED [1] EXTENDED MODE</b>
			0-256	White (0-Black - 255-100%)
	18			<b>RED LED [2] BASIC MODE</b>
			0-255	Red (0-Black - 255-100%)
		17		<b>RED LED [2] EXTENDED MODE</b>
			0-256	Red (0-Black - 255-100%)
	19			<b>GREEN LED [2] BASIC MODE</b>
			0-255	Green (0-Black - 255-100%)
		18		<b>GREEN LED [2] EXTENDED MODE</b>
			0-256	Green (0-Black - 255-100%)
	20			<b>BLUE LED [2] BASIC MODE</b>
			0-255	Blue (0-Black - 255-100%)
		19		<b>BLUE LED [2] EXTENDED MODE</b>
			0-256	Blue (0-Black - 255-100%)
	21			<b>WHITE LED [2] BASIC MODE</b>
			0-255	White (0-Black - 255-100%)
		20		<b>WHITE LED [2] EXTENDED MODE</b>
			0-256	White (0-Black - 255-100%)

**ELATION® PLATINUM WASH ZFX PRO XL™**  
**DMX Channel Values / Functions (160 DMX Channels)**

Specifications are subject to change without any prior written notice.

MODE/CHANNEL			VALUE	FUNCTION
STAND	BASIC	EXTEND		
	22			<b>RED LED [3] BASIC MODE</b>
			0-255	Red (0-Black - 255-100%)
		21		<b>RED LED [3] EXTENDED MODE</b>
			0-256	Red (0-Black - 255-100%)
	23			<b>GREEN LED [3] BASIC MODE</b>
			0-255	Green (0-Black - 255-100%)
		22		<b>GREEN LED [3] EXTENDED MODE</b>
			0-256	Green (0-Black - 255-100%)
	24			<b>BLUE LED [3] BASIC MODE</b>
			0-255	Blue (0-Black - 255-100%)
		23		<b>BLUE LED [3] EXTENDED MODE</b>
			0-256	Blue (0-Black - 255-100%)
	25			<b>WHITE LED [3] BASIC MODE</b>
			0-255	White (0-Black - 255-100%)
		24		<b>WHITE LED [3] EXTENDED MODE</b>
			0-256	White (0-Black - 255-100%)
	26			<b>RED LED [4] BASIC MODE</b>
			0-255	Red (0-Black - 255-100%)
		25		<b>RED LED [4] EXTENDED MODE</b>
			0-256	Red (0-Black - 255-100%)
	27			<b>GREEN LED [4] BASIC MODE</b>
			0-255	Green (0-Black - 255-100%)
		26		<b>GREEN LED [4] EXTENDED MODE</b>
			0-256	Green (0-Black - 255-100%)
	28			<b>BLUE LED [4] BASIC MODE</b>
			0-255	Blue (0-Black - 255-100%)
		27		<b>BLUE LED [4] EXTENDED</b>
			0-256	Blue (0-Black - 255-100%)
	29			<b>WHITE LED [4] BASIC MODE</b>
			0-255	White (0-Black - 255-100%)
				<b>RESET INTERNAL PROGRAMS</b>
			0-79	Normal
			80-84	RESET - All Motors
			85-87	RESET - Scan Motors Only
			88-90	NO Function
			91-93	STORE White Balance Enabled
			94-96	NO Function
			97-99	RESET - All Other Motors
			100-119	Internal Program 1 (Scene 1 - 8)
			120-139	Internal Program 2 (Scene 9 - 16)
			140-159	Internal Program 3 (Scene 17 - 24)
			160-179	Internal Program 4 (Scene 25 - 32)
			180-199	Internal Program 5 (Scene 33 - 40)
			200-219	Internal Program 6 (Scene 41 - 48)
			220-239	Internal Program 7 (Scene 49 - 56)
			240-255	Sound Control (Scene Of Program 1)
		28		<b>WHITE LED [4] EXTENDED MODE</b>
			0-256	White (0-Black - 255-100%)
		29		<b>RED LED [5] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		30		<b>GREEN LED [5] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		31		<b>BLUE LED [5] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		32		<b>WHITE LED [5] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		33		<b>RED LED [6] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		34		<b>GREEN LED [6] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		35		<b>BLUE LED [6] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		36		<b>WHITE LED [6] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		37		<b>RED LED [7] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		38		<b>GREEN LED [7] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		39		<b>BLUE LED [7] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		40		<b>WHITE LED [7] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)

**ELATION® PLATINUM WASH ZFX PRO XL™**  
**DMX Channel Values / Functions (160 DMX Channels)**

Specifications are subject to change without any prior written notice.

MODE/CHANNEL			VALUE	FUNCTION
STAND	BASIC	EXTEND		
		41		<b>RED LED [8] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		42		<b>GREEN LED [8] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		43		<b>BLUE LED [8] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		44		<b>WHITE LED [8] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		45		<b>RED LED [9] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		46		<b>GREEN LED [9] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		47		<b>BLUE LED [9] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		48		<b>WHITE LED [9] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		49		<b>RED LED [10] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		50		<b>GREEN LED [10] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		51		<b>BLUE LED [10] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		52		<b>WHITE LED [10] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		53		<b>RED LED [11] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		54		<b>GREEN LED [11] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		55		<b>BLUE LED [11] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		56		<b>WHITE LED [11] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		57		<b>RED LED [12] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		58		<b>GREEN LED [12] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		59		<b>BLUE LED [12] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		60		<b>WHITE LED [12] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		61		<b>RED LED [13] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		62		<b>GREEN LED [13] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		63		<b>BLUE LED [13] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		64		<b>WHITE LED [13] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		65		<b>RED LED [14] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		66		<b>GREEN LED [14] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		67		<b>BLUE LED [14] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		68		<b>WHITE LED [14] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		69		<b>RED LED [15] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		70		<b>GREEN LED [15] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		71		<b>BLUE LED [15] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		72		<b>WHITE LED [15] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		73		<b>RED LED [16] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		74		<b>GREEN LED [16] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		75		<b>BLUE LED [16] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		76		<b>WHITE LED [16] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)

**ELATION® PLATINUM WASH ZFX PRO XL™**  
**DMX Channel Values / Functions (160 DMX Channels)**

Specifications are subject to change without any prior written notice.

MODE/CHANNEL			VALUE	FUNCTION
STAND	BASIC	EXTEND		
		77		<b>RED LED [17] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		78		<b>GREEN LED [17] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		79		<b>BLUE LED [17] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		80		<b>WHITE LED [17] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		81		<b>RED LED [18] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		82		<b>GREEN LED [18] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		83		<b>BLUE LED [18] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		84		<b>WHITE LED [18] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		85		<b>RED LED [19] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		86		<b>GREEN LED [19] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		87		<b>BLUE LED [19] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		88		<b>WHITE LED [19] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		89		<b>RED LED [20] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		90		<b>GREEN LED [20] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		91		<b>BLUE LED [20] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		92		<b>WHITE LED [20] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		93		<b>RED LED [21] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		94		<b>GREEN LED [21] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		95		<b>BLUE LED [21] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		96		<b>WHITE LED [21] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		97		<b>RED LED [22] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		98		<b>GREEN LED [22] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		99		<b>BLUE LED [22] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		100		<b>WHITE LED [22] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		101		<b>RED LED [23] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		102		<b>GREEN LED [23] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		103		<b>BLUE LED [23] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		104		<b>WHITE LED [23] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		105		<b>RED LED [24] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		106		<b>GREEN LED [24] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		107		<b>BLUE LED [24] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		108		<b>WHITE LED [24] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		109		<b>RED LED [25] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		110		<b>GREEN LED [25] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		111		<b>BLUE LED [25] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		112		<b>WHITE LED [25] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)


**ELATION® PLATINUM WASH ZFX PRO XL™**  
**DMX Channel Values / Functions (160 DMX Channels)**

Specifications are subject to change without any prior written notice.

MODE/CHANNEL			VALUE	FUNCTION
STAND	BASIC	EXTEND		
		113		<b>RED LED [26] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		114		<b>GREEN LED [26] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		115		<b>BLUE LED [26] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		116		<b>WHITE LED [26] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		117		<b>RED LED [27] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		118		<b>GREEN LED [27] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		119		<b>BLUE LED [27] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		120		<b>WHITE LED [27] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		121		<b>RED LED [28] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		122		<b>GREEN LED [28] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		123		<b>BLUE LED [28] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		124		<b>WHITE LED [28] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		125		<b>RED LED [29] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		126		<b>GREEN LED [29] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		127		<b>BLUE LED [29] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		128		<b>WHITE LED [29] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		129		<b>RED LED [30] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		130		<b>GREEN LED [30] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		131		<b>BLUE LED [30] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		132		<b>WHITE LED [30] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		133		<b>RED LED [31] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		134		<b>GREEN LED [31] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		135		<b>BLUE LED [31] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		136		<b>WHITE LED [31] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		137		<b>RED LED [32] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		138		<b>GREEN LED [32] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		139		<b>BLUE LED [32] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		140		<b>WHITE LED [32] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		141		<b>RED LED [33] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		142		<b>GREEN LED [33] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		143		<b>BLUE LED [33] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		144		<b>WHITE LED [33] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)
		145		<b>RED LED [34] EXTENDED MODE</b>
			0-255	Red (0-Black - 255-100%)
		146		<b>GREEN LED [34] EXTENDED MODE</b>
			0-255	Green (0-Black - 255-100%)
		147		<b>BLUE LED [34] EXTENDED MODE</b>
			0-255	Blue (0-Black - 255-100%)
		148		<b>WHITE LED [34] EXTENDED MODE</b>
			0-255	White (0-Black - 255-100%)

ELATION® PLATINUM WASH ZFX PRO XL™				
DMX Channel Values / Functions (160 DMX Channels)				
Specifications are subject to change without any prior written notice.				
MODE/CHANEL			VALUE	FUNCTION
STAND	BASIC	EXTEND		
		149	0-255	<b>RED LED [35] EXTENDED MODE</b> Red (0-Black - 255-100%)
		150	0-255	<b>GREEN LED [35] EXTENDED MODE</b> Green (0-Black - 255-100%)
		151	0-255	<b>BLUE LED [35] EXTENDED MODE</b> Blue (0-Black - 255-100%)
		152	0-255	<b>WHITE LED [35] EXTENDED MODE</b> White (0-Black - 255-100%)
		153	0-255	<b>RED LED [36] EXTENDED MODE</b> Red (0-Black - 255-100%)
		154	0-255	<b>GREEN LED [36] EXTENDED MODE</b> Green (0-Black - 255-100%)
		155	0-255	<b>BLUE LED [36] EXTENDED MODE</b> Blue (0-Black - 255-100%)
		156	0-255	<b>WHITE LED [36] EXTENDED MODE</b> White (0-Black - 255-100%)
		157	0-255	<b>RED LED [37] EXTENDED MODE</b> Red (0-Black - 255-100%)
		158	0-255	<b>GREEN LED [37] EXTENDED MODE</b> Green (0-Black - 255-100%)
		159	0-255	<b>BLUE LED [37] EXTENDED MODE</b> Blue (0-Black - 255-100%)
		160	0-255	<b>WHITE LED [37] EXTENDED MODE</b> White (0-Black - 255-100%)

### LED GROUPS - Standard Mode

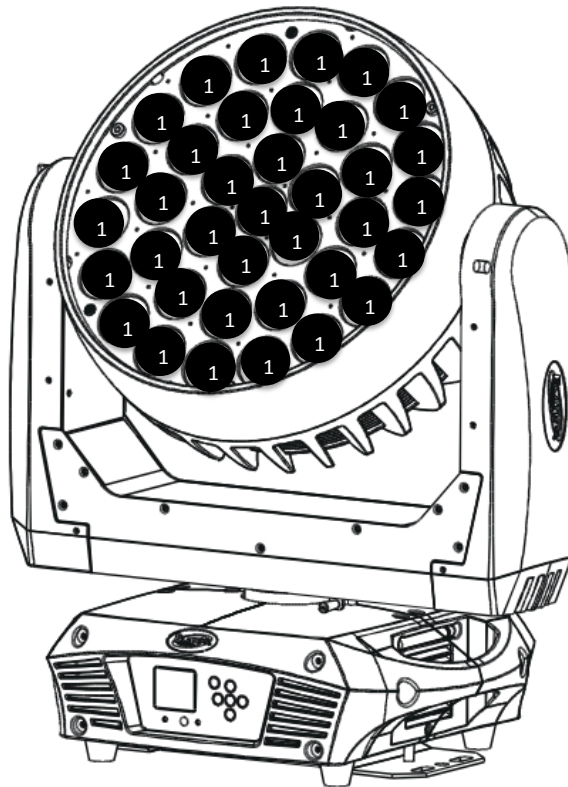


**ELATION® PLATINUM WASH ZFX PRO XL™**  
**DMX Channel Values / Functions (160 DMX Channels)**

Specifications are subject to change without any prior written notice.

MODE/CHANEL			VALUE	FUNCTION
STAND	BASIC	EXTEND		

**LED GROUPS - Basic Mode**

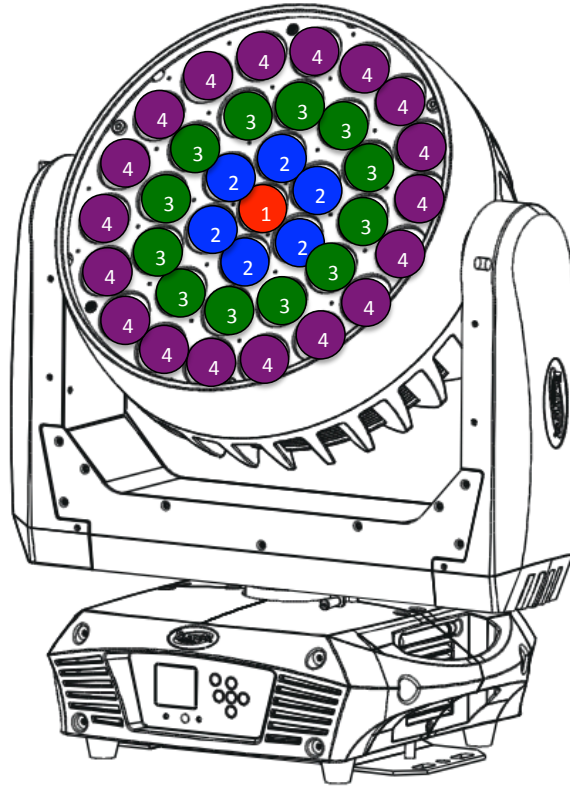

**LED GROUPS - Extended Mode**

